


TECHNICAL SPECIFICATIONS		
VOLTS		120V
AMPS		12.5A
WATTS		1500W
HEATER	HIGH	1500W watts
HEATER	LOW	750W watts
NO HEATER		26 WATTS MAX
QUANTIT		53 PCS LED
LAMPS	WATTS	0.5W&0.15W&0.06W
TOTAL WATTS		25.4 W
GLASS VIEWING OPENING FRAMING SIZE		1 at 2.9 watts
		17 " X 34 1/2 " X 6 1/2 "
		13 " X 30 1/2 "
		15 3/4 " X 33 1/4 " X 6 1/2 "
		21 5/8 " X 41 3/4 " X 10 7/8
		61.6 LBS
		1
		Included
PLUG LOCATI	ON	Left Side
CORD LENGTH APPROX.HEATING AREA		70.9 < L < 95.5
		400 SQ FT




SCALE 1"=1'-0"


DATE:04/16/2024

SHEET 1 OF 1

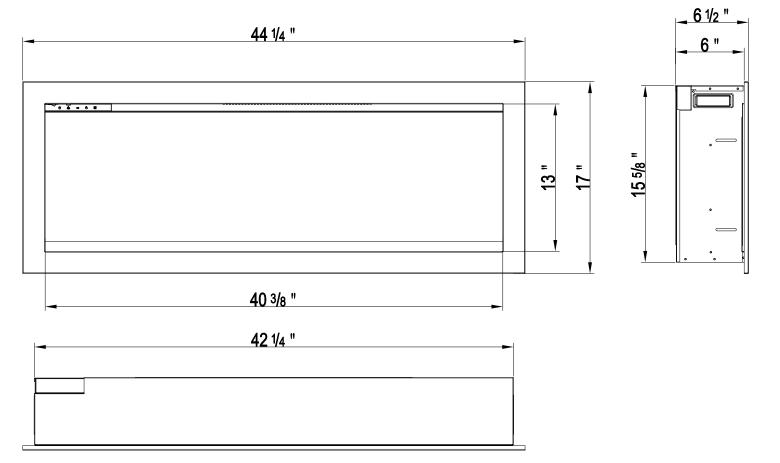

VOLTS		120V
AMPS		12.5A
WATTS		1500W
HEATER	HIGH	1500W watts
TEATER	LOW	750W watts
NO HEATER		37.2 WATTS MAX
	QUANTITY	75 PCS LED
LAMPS	WATTS	0.5W&0.15W&0.06W
TOTAL WA	OTAL WATTS	27 W
ROTOR MOT	OR	1 at 2.9 watts
HEIGHT.WID	TH.DEPTH	17 " X 44 1/4 " X 6 1/2 "
GLASS VIEW	ING OPENING	13 " X 40 3/8 "
FRAMING SI	ZE	15 3/4 " X43 1/8 " X 6 1/2
SHIPPING S	IZE	21 5/8 " X 51 1/2 " X 10 7/8
SHIPPING W	EIGHT	73.7 LBS
	UNIT	1
G	LASS FRONT	Included
PLUG LOCA	TION	Left Side
CORD LENG	тн	70.9 < L < 95.5
APPROX HE	ATING AREA	400 SQ FT

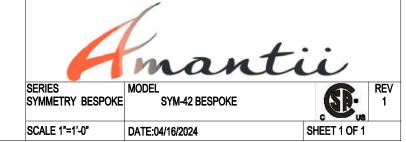


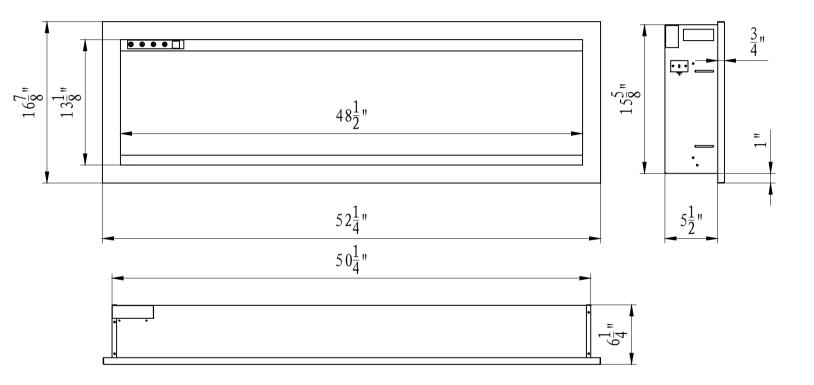

TECHNICAL SPECIFICATIONS		
VOLTS	120 V	
AMPS	12.5 A	
WATTS	1465 watts	
HEATER HIGH	1465 watts	
LOW	750 watts	
NO HEATER	21 watts Max.	
LAMPS TYPE	LED	
TOTAL WATTS	19 watts	
ROTOR MOTOR	1 at 2.9 watts	
HEIGHT,WIDTH,DEPTH	15 \frac{5}{8}" \times 50 \frac{1}{4} " \times 5 \frac{1}{2}"	
GLASS VIEWING OPENING	48 ½" ×13 ½"	
SURROUND SIZE	52 ½ "×16 ½ "	
SHIPPING SIZE	59 ½ " × 10 ½ "× 21 ½ "	
SHIPPING WEIGHT	82.50 LBS	
UNIT		
GLASS FRONT	Included	
PLUG LOCATION	Left Side	
CORD LENGTH	70 ½ " <l<95 td="" ½"<=""></l<95>	
APPROX. HEATING AREA	400 sq ft	




SERIES	MODEL		REV.
BESPOKE	SYM-50		1
SCALE	DATE: 22/6/2020	SHEET 1 C)F 1

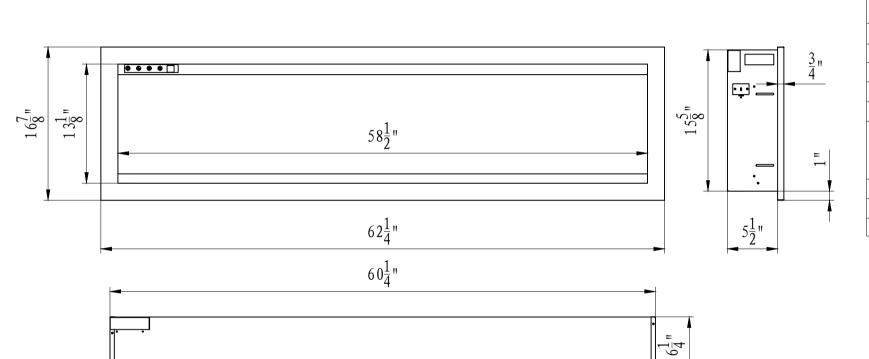

TECHNICAL SPECIFICATIONS		
VOLTS	120 V	
AMPS	12.5 A	
WATTS	1465 watts	
HEATER HIGH	1465 watts	
LOW	750 watts	
NO HEATER	31 watts Max.	
LAMPS TYPE	LED	
TOTAL WATTS	28 watts	
ROTOR MOTOR	1 at 2.9 watts	
HEIGHT,WIDTH,DEPTH	15 \frac{5}{8}" \times 60 \frac{1}{4} " \times 5 \frac{1}{2}"	
GLASS VIEWING OPENING	58 ½" ×13 ½"	
SURROUND SIZE	62 ½ "×16 ½ "	
SHIPPING SIZE	69 ½ " × 10 ½ "× 21 ½ "	
SHIPPING WEIGHT	101.20 LBS	
UNIT		
GLASS FRONT	Included	
PLUG LOCATION	Left Side	
CORD LENGTH	70 ½ " <l<95 td="" ½"<=""></l<95>	
APPROX. HEATING AREA	400 sq ft	



SERIES	MODEL		REV.
BESPOKE	SYM-60		1
SCALE	DATE: 22/6/2020	SHEET 1 C)F 1

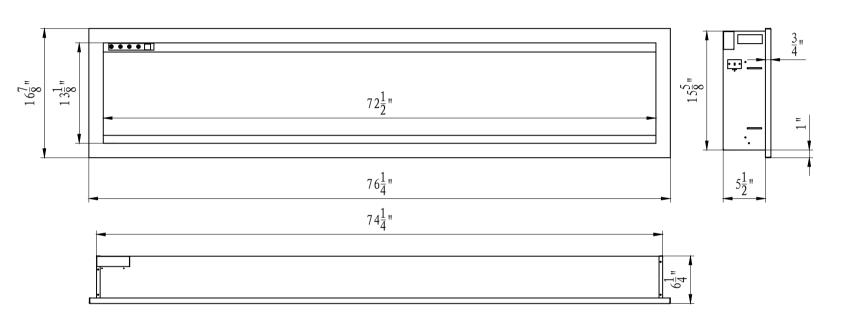



TECHNICAL SPECIFICATIONS VOLTS 120 V AMPS 12.5 A WATTS 1465 watts HEATER HIGH 1465 watts LOW 750 watts NO HEATER 36 watts Max. LAMPS TYPE LED TOTAL WATTS 35 watts **ROTOR MOTOR** 1 at 2.9 watts 15 \frac{5}{8}" \times 74 \frac{1}{4} " \times 5 \frac{1}{2}" HEIGHT, WIDTH, DEPTH $72\frac{1}{2}$ " × $13\frac{1}{8}$ " **GLASS VIEWING OPENING** 76 ½ "×16 ½ " SURROUND SIZE 85 " × 11 ½" × 22 ½" SHIPPING SIZE 121.25 LBS SHIPPING WEIGHT UNIT **GLASS FRONT** Included PLUG LOCATION Left Side CORD LENGTH 70 ⁷/₈ " <L<95 ¹/₂" 400 sq ft



APPROX. HEATING AREA

SERIES	MODEL		REV.
BESPOKE	SYM-74		1
SCALE	DATE: 11/11/2020	SHEET 1 C)F 1

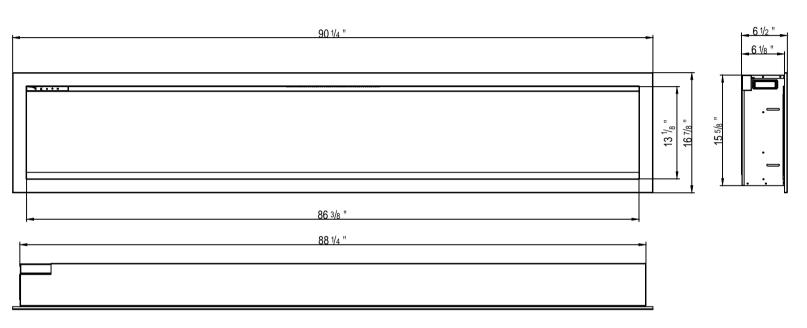

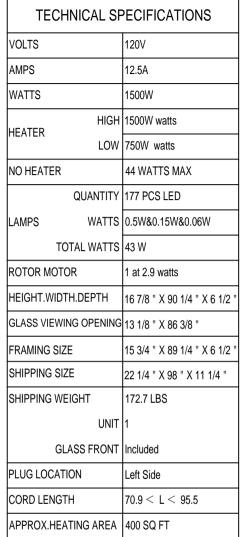




SERIES M SYMMETRY BESPOKE

ODEL SYM-88 BESPOKE c tus

SCALE 1"=1'-0" DATE:04/16/2024

SHEET 1 OF 1

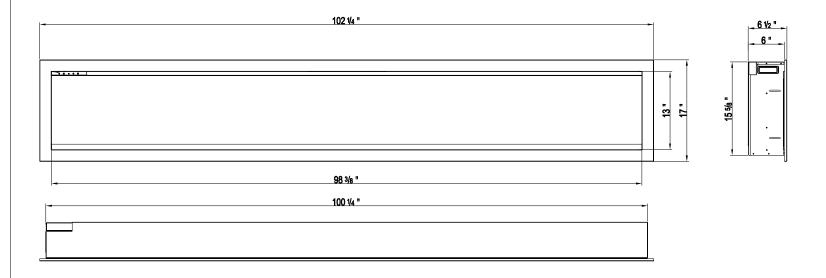

TECHNICAL SPECIFICATIONS	
VOLTS	120V
AMPS	12.5A
WATTS	1500W
HIGH HEATER	1500W watts
	750W watts
NO HEATER	47 WATTS MAX
QUANTITY	205 PCS LED
LAMPS WATTS	0.5W&0.15W&0.06W
TOTAL WATTS	46 W
ROTOR MOTOR	1 at 2.9 watts
HEIGHT.WIDTH.DEPTH	17 " X 102 1/4 " X 6 1/2 "
GLASS VIEWING OPENING	13 " X 98 3/8 "
FRAMING SIZE	15 3/4 " X 101 1/8 " X 6 1/2 "
SHIPPING SIZE	22 1/4 " X 110 " X 11 1/4 "
SHIPPING WEIGHT	193 LBS
UNIT	1
GLASS FRONT	Included
PLUG LOCATION	Left Side
CORD LENGTH	70.9 < L < 95.5
APPROX.HEATING AREA	400 SQ FT



SCALE 1"=1'-0"

DATE:04/16/2024

SHEET 1 OF 1