

SPECIFICATIONS

Product Dimensions 48 13/16" W x 16 3/4" H x 9 1/6" D

Fascia Dimensions 51 3/6" W x 18" H x 1/4" D

Glass Size 45 1/4" W x 11 13/16" H


Power Requirement 3-blade 120V, 15A grounded

electrical outlet, with an accessible isolation switch. The appliance can be hard wired.

Heat Output 5100 BTU (1.5kW)

Cord Length 71" - Located on the rear panel

on the right hand side.

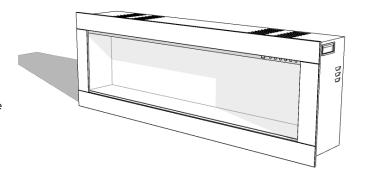

CLEARANCES

Appliance Clearances

This appliance is designed to be installed into a new or existing purpose built framed structure or recessed into a wall or mantel (depth permitting).

Heat resistant or non-combustible materials are not required for this installation.

TV Clearance

TV can be installed 6" from above the glass.

Cavity Base

This appliance **MUST** be fully supported on its base, over the entire area of the underside of the appliance. The base must also be level and strong enough to support the total appliance weight (70.55lb).

Clearance to Combustible Materials

Keep combustible materials including bedding, curtains, and clothes at least 39" from the **front** of the appliance.

FUELBEDS

The Ambe Linear50 electric fireplace includes five interchangeable fireplace media kits.



Clear Acrylic



Black Acrylic



White Stone



Logs




Bronze Crushed Glass



CAVITY CONSTRUCTION & INSTALLATION PROCESS

Before installation, refer to the installation manual for safety information.


Step 1



Find a suitable location with an electrical outlet within **39"** of the fireplace.


Provide an isolation switch outside the framing.

Step 2




Construct the cavity to the desired size, allowing for the following wall opening dimensions: 49 1/4" W x 17 1/8" H x 10" D

Step 3



Install the selected wall panels, cutting a hole following the wall opening size.


Step 4



Insert the appliance into the wall opening and align to the finished wall panel.

Secure through the side brackets.

Step 5



Fit the glass fascia to the fireplace. Finalise all finishes and fixtures to complete the project.



SPECIFICATIONS

Product Dimensions 68 13/16" W x 16 3/4" H x 9 1/6" D

Fascia Dimensions 71 3/16" W x 18" H x 1/4" D

Glass Size 65 3/8" W x 11 13/16" H


Power Requirement 3-blade 120V, 15A grounded

electrical outlet, with an accessible isolation switch. The appliance can be hard wired.

Heat Output 5100 BTU (1.5kW)

Cord Length 71" - Located on the rear panel

on the right hand side.

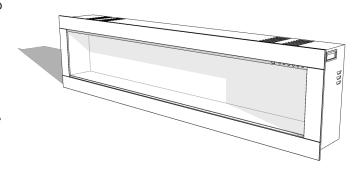

CLEARANCES

Appliance Clearances

This appliance is designed to be installed into a new or existing purpose built framed structure or recessed into a wall or mantel (depth permitting).

Heat resistant or non-combustible materials are not required for this installation.

TV Clearance

TV can be installed 6" from above the glass

Cavity Base

This appliance **MUST** be fully supported on its base, over the entire area of the underside of the appliance. The base must also be level and strong enough to support the total product weight (110.23lb).

Clearance to Combustible Materials

Keep combustible materials including bedding, curtains, and clothes at least 39" from the **FRONT** of the fire.

FUELBEDS

The Ambe Linear72 electric fireplace includes five interchangeable fireplace media kits.



Clear Acrylic



Black Acrylic



White Stone



Logs




Bronze Crushed Glass



CAVITY CONSTRUCTION & INSTALLATION PROCESS

Before installation, refer to the installation manual for safety information.


Step 1



Find a suitable location with an electrical outlet within **39"** of the fireplace.

Provide an isolation switch outside the framing.


Step 2



Construct the framing to the desired size, allowing for the following wall opening dimensions:


69 1/4" W x 17 1/8" H x 10" D

Step 3



Install the selected wall panels, cutting a hole following the wall opening size.


Step 4



Insert the fireplace into the wall opening and align to the finished wall panel.

Secure in place through the side brackets.

Step 5



Fit the glass fascia to the fireplace. Finalise all finishes and fixtures to complete the project.