

Order No. Model No.	500003050 ASP30	
Notes:		

PART 1 GENERAL

1.1 SECTION INCLUDES

- A. Manufactured electric fireplaces.
- B. Accessories

1.2 RELATED SECTIONS

A. Section 06100 - Rough Carpentry: Wood framed rough opening and enclosure.

1.3 REFERENCES

- A. UL 2021
- B. CSA C22.2 No. 46

1.4 SUBMITTALS

- A. Submit under provisions of Section 01300.
- B. Product Data: Manufacturer's data sheets on each product to be used, including:
 - 1. Preparation instructions and recommendations.
 - 2. Storage and handling requirements and recommendations.
 - 3. Installation methods.
- C. Manufacturer's Certificates: Certify products meet or exceed specified requirements.
- D. Manufacturer's warranty.

1.5 DELIVERY, STORAGE, AND HANDLING

- A. Store products in manufacturer's unopened packaging until ready for installation.
- B. Protect materials from exposure to moisture. Do not deliver until after wet work is complete and dry.

1.6 WARRANTY

A. Provide the manufacturer's 5-year limited warranty on electrical components.

PART 2 PRODUCTS

2.1 ACCEPTABLE MANUFACTURERS

- A. Pre-fabricated Electric Fireplace:
 - Base: Dimplex Electric Fireplace Glen Dimplex Americas

1367 Industrial Road

Cambridge ON N3H 4W3

1-888-346-7539

- 2. Substitutions not permitted
- 3. Requests for substitutions will be considered in accordance with provisions of Section 01600.



Order No. Model No.	500003050 ASP30	
Notes:		

2.2 ELECTRIC FIREPLACES

A. General:

- Provide all components and accessories required for a complete, functional unit.
- 2. cULus listed, file E71416

- 1. Base Product:
 - a) Dimplex Ignite Aspire Electric Firebox
 - b) Material Number: 500003050
 - c) Model Number: ASP30
 - d) Regulatory model number: 6914180100
- 2. Description: 30" Built-in Portrait Electric Firebox
- 3. Dimensions:
 - a) Width: 30-9/16" / 77.7 cmb) Height: 37-1/2" / 95.3 cmc) Depth: 17-1/2" / 44.5 cm
- 4. Framing Dimensions:
 - a) Width: 30-3/4" / 78.2 cmb) Height: 38" / 96.6 cmc) Depth: 18" / 45.8cm
- 5. Electrical:
 - a) Volts: 120 V (3-Wire) or 240 V (4-Wire)b) Watts: 1500 W at 120 V, 2500 W at 240 V
 - c) BTUs/hr: 5118 | 8530 d) Amps: 12.5/10.4
- 6. Venting: Non-venting
- 7. Operation: Flame only, flame and heat
- 8. Heating: Fan-forced circulation with option to permanently disable the heater
- 9. Liner: Steel
- 10. Standard features:
 - a) NEW patent-pending Dynamic-Fire Flame Effect for remarkably realistic flames.
 - b) NEW patent-pending rhythmic logs with inner glow technology.
 - c) Seamless installation. Enjoy true design versatility with your choice of four installation options in one fireplace: front-facing, left-corner, right-corner, or bay-style, plug kit is included. Trim Installation Kit required (sold separately) for bay and corner installations.
 - d) Flame Connect App takes the increased options of the remote and makes the personalization endless.



Order No. Model No.	500003050 ASP30	
Notes:		

- e) Three natural crackling fire sound options to enhance the ambiance of the fire.
- f) Hardwire capabilities 120V, 240V.
- g) Onboard controls and wall-mountable remote.
- h) Built-in Timer Set for up to 8 hours.
- Equipped with integrated self-diagnostic technology that provides maintenance and operation feedback.

11. Control options:

- a) Flame Connect mobile app
- b) Multi-function remote control with wall-mount
- c) Onboard controls (Standby, heat, link)
- d) Built-in power switch

12. Optional Accessories:

- a) Trim Kit 500003783
- b) Other optional accessories available

PART 3 EXECUTION

3.1 INSPECTION

- A. Do not begin installation until substrates have been properly prepared.
- B. If substrate preparation is the responsibility of another installer, notify Architect of unsatisfactory preparation before proceeding.
- C. Verify proper power supply and fuel source are available.

3.2 PREPARATION

- A. Clean surfaces thoroughly prior to installation.
- B. Prepare surfaces using the methods recommended by the manufacturer for achieving the best result for the substrate under the project conditions.


3.3 INSTALLATION


- A. Install in accordance with manufacturer's instructions and requirements of authorities having iurisdiction.
- B. Use manufacturer's guidelines for minimum clearances to combustibles, walls, and finishes.
- C. Anchor all components firmly in position for long life under hard use.
- D. Upon completion of installation, visually inspect all exposed surfaces. Touch up scratches and abrasions with touch up paint recommended by the manufacturer; make imperfections invisible to the unaided eye from a distance of 5 feet (1.5 m).
- E. To use the mobile app, install where a WiFi connection is available.
- F. To install with no heat, refer to user manual (PN, 7216830100), Section 8.

- A. Protect installed products until completion of project.
- B. Touch-up, repair or replace damaged products before Substantial Completion.



Order No. Model No.	500003050 ASP30
Notes:	

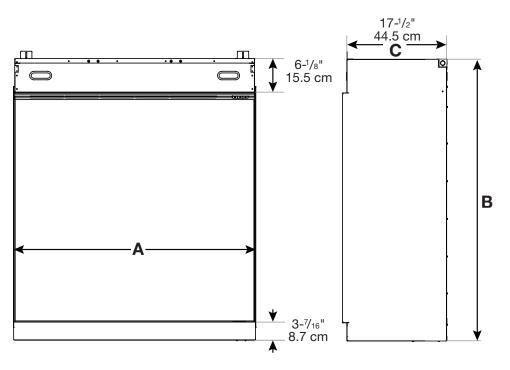

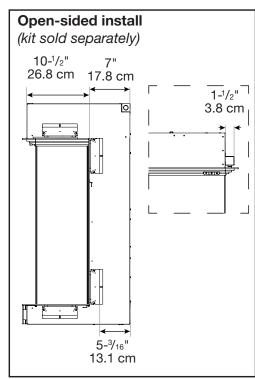

Product ASP30	A WIDTH (in/cm)	B HEIGHT with trim (in/cm)	C DEPTH (in/cm)	VIEWING DIMENSION - WxHxD (in/cm)
Front Install	30-9/16 (77.7)	37-1/2 (95.3)	17-1/2 (44.5)	30 x 28 x 9 (76.2 x 71.1 x 22.9)





Order No. Model No.	500003050 ASP30		
Notes:			

Model	Width	Height	Depth
Model	A	В	C
ASP30	30-3/4"	38"	
ASPSU	78.2 cm	96.6 cm	
ASP36	36-3/4"	44"	
ASPSO	93.4 cm	111.8 cm	18"
ASP42	42-3/4"	47"	45.8 cm
ASP42	108.6 cm	119.4 cm	
ASP48	48-3/4"	50"	
A3F40	123.9 cm	127 cm	

Prepare a wall with a framed opening, following the dimensions in the table.

- ♠ CAUTION: This fireplace is NOT load-bearing. Ensure the opening for the fireplace is framed in such a way that the weight of the building materials will not create pressure on the top of the fireplace.
- ! NOTE: Wiring connections are located at the back of the firebox, in the top right corner.

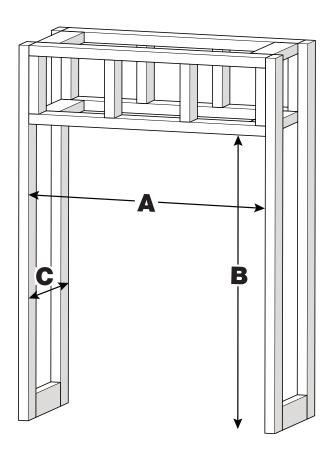







Order No. Model No.	500003051 ASP36		
Notes:			

PART 1 GENERAL

1.1 SECTION INCLUDES

- A. Manufactured electric fireplaces.
- B. Accessories

1.2 RELATED SECTIONS

A. Section 06100 - Rough Carpentry: Wood framed rough opening and enclosure.

1.3 REFERENCES

- A. UL 2021
- B. CSA C22.2 No. 46

1.4 SUBMITTALS

- A. Submit under provisions of Section 01300.
- B. Product Data: Manufacturer's data sheets on each product to be used, including:
 - 1. Preparation instructions and recommendations.
 - 2. Storage and handling requirements and recommendations.
 - 3. Installation methods.
- C. Manufacturer's Certificates: Certify products meet or exceed specified requirements.
- D. Manufacturer's warranty.

1.5 DELIVERY, STORAGE, AND HANDLING

- A. Store products in manufacturer's unopened packaging until ready for installation.
- B. Protect materials from exposure to moisture. Do not deliver until after wet work is complete and dry.

1.6 WARRANTY

A. Provide the manufacturer's 5-year limited warranty on electrical components.

PART 2 PRODUCTS

2.1 ACCEPTABLE MANUFACTURERS

- A. Pre-fabricated Electric Fireplace:
 - Base: Dimplex Electric Fireplace Glen Dimplex Americas

1367 Industrial Road

Cambridge ON N3H 4W3

1-888-346-7539

- 2. Substitutions not permitted
- 3. Requests for substitutions will be considered in accordance with provisions of Section 01600.



Order No. Model No.	500003051 ASP36		
Notes:			

2.2 ELECTRIC FIREPLACES

A. General:

- Provide all components and accessories required for a complete, functional unit.
- 2. cULus listed, file E71416

- 1. Base Product:
 - a) Dimplex Ignite Aspire Electric Firebox
 - b) Material Number: 500003051
 - c) Model Number: ASP36
 - d) Regulatory model number: 6914180300
- 2. Description: 36" Built-in Portrait Electric Firebox
- 3. Dimensions:
 - a) Width: 36-9/16"/ 92.9 cmb) Height: 43-1/2" / 110.5 cmc) Depth: 17-1/2"/ 44.5 cm
- 4. Framing Dimensions:
 - a) Width: 36 3/4" / 44 cmb) Height: 44" / 111.8 cmc) Depth: 18" / 45.8cm
- 5. Electrical:
 - a) Volts: 120 V (3-Wire) or 240 V (4-Wire)b) Watts: 1500 W at 120 V, 2500 W at 240 V
 - c) BTUs/hr: 5118 | 8530d) Amps: 12.5/10.4
- 6. Venting: Non-venting
- 7. Operation: Flame only, flame and heat
- 8. Heating: Fan-forced circulation with option to permanently disable the heater
- 9. Liner: Steel
- 10. Standard features:
 - a) NEW patent-pending Dynamic-Fire Flame Effect for remarkably realistic flames.
 - b) NEW patent-pending rhythmic logs with inner glow technology.
 - c) Seamless installation. Enjoy true design versatility with your choice of four installation options in one fireplace: front-facing, left-corner, right-corner, or bay-style, plug kit is included. Trim Installation Kit required (sold separately) for bay and corner installations.
 - d) Flame Connect App takes the increased options of the remote and makes the personalization endless.



Order No. Model No.	500003051 ASP36	
Notes:		

- e) Three natural crackling fire sound options to enhance the ambiance of the fire.
- f) Hardwire capabilities 120V, 240V.
- g) Onboard controls and wall-mountable remote.
- h) Built-in Timer Set for up to 8 hours.
- i) Equipped with integrated self-diagnostic technology that provides maintenance and operation feedback.

11. Control options:

- a) Flame Connect mobile app
- b) Multi-function remote control with wall-mount
- c) Onboard controls (Standby, heat, link)
- d) Built-in power switch

12. Optional Accessories:

- a) Trim Kit 500003783
- b) Other optional accessories available

PART 3 EXECUTION

3.1 INSPECTION

- A. Do not begin installation until substrates have been properly prepared.
- B. If substrate preparation is the responsibility of another installer, notify Architect of unsatisfactory preparation before proceeding.
- C. Verify proper power supply and fuel source are available.

3.2 PREPARATION

- A. Clean surfaces thoroughly prior to installation.
- B. Prepare surfaces using the methods recommended by the manufacturer for achieving the best result for the substrate under the project conditions.


3.3 INSTALLATION


- A. Install in accordance with manufacturer's instructions and requirements of authorities having jurisdiction.
- B. Use manufacturer's guidelines for minimum clearances to combustibles, walls, and finishes.
- C. Anchor all components firmly in position for long life under hard use.
- D. Upon completion of installation, visually inspect all exposed surfaces. Touch up scratches and abrasions with touch up paint recommended by the manufacturer; make imperfections invisible to the unaided eye from a distance of 5 feet (1.5 m).
- E. To use the mobile app, install where a WiFi connection is available.
- F. To install with no heat, refer to user manual (PN, 7216840100), Section 8.

- A. Protect installed products until completion of project.
- B. Touch-up, repair or replace damaged products before Substantial Completion.



Order No. Model No.	500003051 ASP36
Notes:	

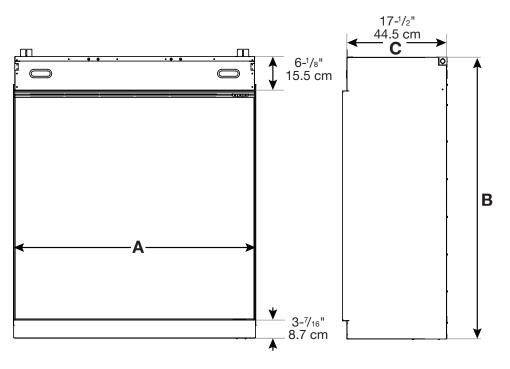

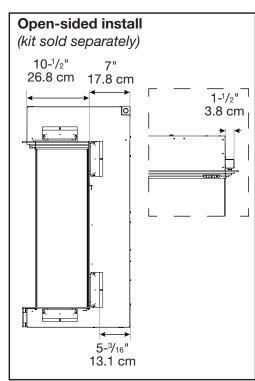

Product ASP36	A WIDTH (in/cm)	B HEIGHT with trim (in/cm)	C DEPTH (in/cm)	VIEWING DIMENSION - WxHxD (in/cm)
Front Install	36-9/16 (92.9)	43-1/2 (95.3)	17-1/2 (44.5)	36 x 34 x 9 (86.4 x 86.4 x 22.9)





Order No. Model No.	500003051 ASP36	
Notes:		

Model	Width	Height	Depth
Model	A	В	C
ASP30	30-3/4"	38"	
ASPSU	78.2 cm	96.6 cm	
A O DO O	36-3/4"	44"	
ASP36	93.4 cm	111.8 cm	18"
ASP42	42-3/4"	47"	45.8 cm
A3P42	108.6 cm	119.4 cm	
ASP48	48-3/4"	50"	
A3P40	123.9 cm	127 cm	

Prepare a wall with a framed opening, following the dimensions in the table.

- ♠ CAUTION: This fireplace is NOT load-bearing. Ensure the opening for the fireplace is framed in such a way that the weight of the building materials will not create pressure on the top of the fireplace.
- ! NOTE: Wiring connections are located at the back of the firebox, in the top right corner.

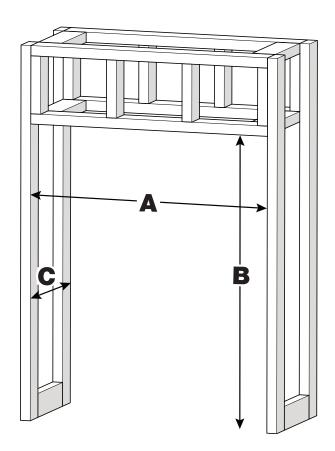







Order No. Model No.	500003049 ASP42	
Notes:		

PART 1 GENERAL

1.1 SECTION INCLUDES

- A. Manufactured electric fireplaces.
- B. Accessories

1.2 RELATED SECTIONS

A. Section 06100 - Rough Carpentry: Wood framed rough opening and enclosure.

1.3 REFERENCES

- A. UL 2021
- B. CSA C22.2 No. 46

1.4 SUBMITTALS

- A. Submit under provisions of Section 01300.
- B. Product Data: Manufacturer's data sheets on each product to be used, including:
 - 1. Preparation instructions and recommendations.
 - 2. Storage and handling requirements and recommendations.
 - 3. Installation methods.
- C. Manufacturer's Certificates: Certify products meet or exceed specified requirements.
- D. Manufacturer's warranty.

1.5 DELIVERY, STORAGE, AND HANDLING

- A. Store products in manufacturer's unopened packaging until ready for installation.
- B. Protect materials from exposure to moisture. Do not deliver until after wet work is complete and dry.

1.6 WARRANTY

A. Provide the manufacturer's 5-year limited warranty on electrical components.

PART 2 PRODUCTS

2.1 ACCEPTABLE MANUFACTURERS

- A. Pre-fabricated Electric Fireplace:
 - Base: Dimplex Electric Fireplace Glen Dimplex Americas

1367 Industrial Road

Cambridge ON N3H 4W3

1-888-346-7539

- 2. Substitutions not permitted
- 3. Requests for substitutions will be considered in accordance with provisions of Section 01600.



Order No. Model No.	500003049 ASP42	
Notes:		

2.2 ELECTRIC FIREPLACES

A. General:

- 1. Provide all components and accessories required for a complete, functional unit.
- 2. cULus listed, file E71416

- 1. Base Product:
 - a) Dimplex Ignite Aspire Electric Firebox
 - b) Material Number: 500003049
 - c) Model Number: ASP42
 - d) Regulatory model number: 6914180400
- 2. Description: 42" Built-in Portrait Electric Firebox
- 3. Dimensions:
 - a) Width: 42-5/8"/ 108.2 cmb) Height: 46-1/2" / 118.1 cmc) Depth: 17-1/2"/ 44.5 cm
- 4. Framing Dimensions:
 - a) Width: 42 3/4" / 108.6 cmb) Height: 47" / 119.4 cmc) Depth: 18" / 45.8 cm
- 5. Electrical:
 - a) Volts: 120 V (3-Wire) or 240 V (4-Wire)b) Watts: 1500 W at 120 V, 2500 W at 240 V
 - c) BTUs/hr: 5118 | 8530d) Amps: 12.5/10.4
- 6. Venting: Non-venting
- 7. Operation: Flame only, flame and heat
- 8. Heating: Fan-forced circulation with option to permanently disable the heater
- 9. Liner: Steel
- 10. Standard features:
 - a) NEW patent-pending Dynamic-Fire Flame Effect for remarkably realistic flames.
 - b) NEW patent-pending rhythmic logs with inner glow technology.
 - c) Seamless installation. Enjoy true design versatility with your choice of four installation options in one fireplace: front-facing, left-corner, right-corner, or bay-style, plug kit is included. Trim Installation Kit required (sold separately) for bay and corner installations.
 - d) Flame Connect App takes the increased options of the remote and makes the personalization endless.
 - e) Three natural crackling fire sound options to enhance the ambiance of the fire.



Order No. Model No.	500003049 ASP42	
Notes:		

- f) Hardwire capabilities 120V, 240V.
- g) Onboard controls and wall-mountable remote.
- h) Built-in Timer Set for up to 8 hours.
- i) Equipped with integrated self-diagnostic technology that provides maintenance and operation feedback.

11. Control options:

- a) Flame Connect mobile app
- b) Multi-function remote control with wall-mount
- c) Onboard controls (Standby, heat, link)
- d) Built-in power switch

12. Optional Accessories:

- a) Trim Kit 500003783
- b) Other optional accessories available

PART 3 EXECUTION

3.1 INSPECTION

- A. Do not begin installation until substrates have been properly prepared.
- B. If substrate preparation is the responsibility of another installer, notify Architect of unsatisfactory preparation before proceeding.
- C. Verify proper power supply and fuel source are available.

3.2 PREPARATION

- A. Clean surfaces thoroughly prior to installation.
- B. Prepare surfaces using the methods recommended by the manufacturer for achieving the best result for the substrate under the project conditions.


3.3 INSTALLATION


- A. Install in accordance with manufacturer's instructions and requirements of authorities having jurisdiction.
- B. Use manufacturer's guidelines for minimum clearances to combustibles, walls, and finishes.
- C. Anchor all components firmly in position for long life under hard use.
- D. Upon completion of installation, visually inspect all exposed surfaces. Touch up scratches and abrasions with touch up paint recommended by the manufacturer; make imperfections invisible to the unaided eye from a distance of 5 feet (1.5 m).
- E. To use the mobile app, install where a WiFi connection is available.
- F. To install with no heat, refer to user manual (PN, 7216840100), Section 8.

- A. Protect installed products until completion of project.
- B. Touch-up, repair or replace damaged products before Substantial Completion.



Order No. Model No.	500003049 ASP42	
Notes:		

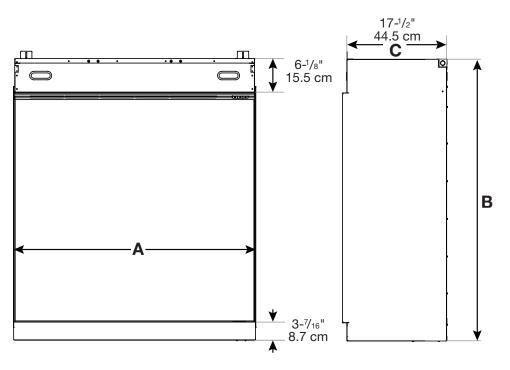

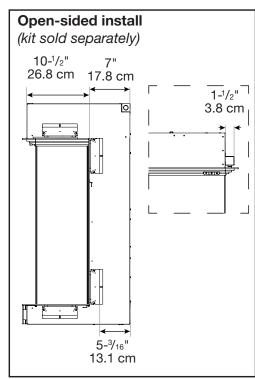

Product ASP42	A WIDTH (in/cm)	B HEIGHT with trim (in/cm)	C DEPTH (in/cm)	VIEWING DIMENSION - WxHxD (in/cm)
Front Install	42-5/8 (108.2)	46-1/2 (118.1)	17-1/2 (44.5)	42 x 37 x 9 (106.9 x 94 x 22.9)





Order No. Model No.	500003049 ASP42		
Notes:			

Model	Width	Height	Depth
Model	A	В	C
ASP30	30-3/4"	38"	
ASPSU	78.2 cm	96.6 cm	
A O DO O	36-3/4"	44"	
ASP36	93.4 cm	111.8 cm	18"
ASP42	42-3/4"	47"	45.8 cm
A3P42	108.6 cm	119.4 cm	
ASP48	48-3/4"	50"	
A3P40	123.9 cm	127 cm	

Prepare a wall with a framed opening, following the dimensions in the table.

- ♠ CAUTION: This fireplace is NOT load-bearing. Ensure the opening for the fireplace is framed in such a way that the weight of the building materials will not create pressure on the top of the fireplace.
- ! NOTE: Wiring connections are located at the back of the firebox, in the top right corner.

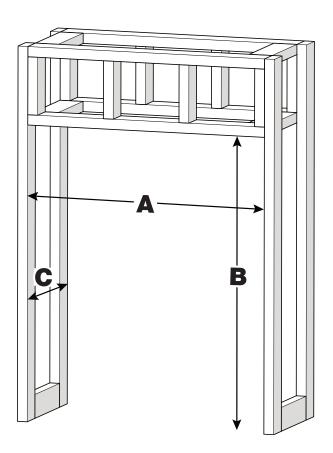







Order No. Model No.	500003060 ASP48		
Notes:			

PART 1 GENERAL

1.1 SECTION INCLUDES

- A. Manufactured electric fireplaces.
- B. Accessories

1.2 RELATED SECTIONS

A. Section 06100 - Rough Carpentry: Wood framed rough opening and enclosure.

1.3 REFERENCES

- A. UL 2021
- B. CSA C22.2 No. 46

1.4 SUBMITTALS

- A. Submit under provisions of Section 01300.
- B. Product Data: Manufacturer's data sheets on each product to be used, including:
 - 1. Preparation instructions and recommendations.
 - 2. Storage and handling requirements and recommendations.
 - 3. Installation methods.
- C. Manufacturer's Certificates: Certify products meet or exceed specified requirements.
- D. Manufacturer's warranty.

1.5 DELIVERY, STORAGE, AND HANDLING

- A. Store products in manufacturer's unopened packaging until ready for installation.
- B. Protect materials from exposure to moisture. Do not deliver until after wet work is complete and dry.

1.6 WARRANTY

A. Provide the manufacturer's 5-year limited warranty on electrical components.

PART 2 PRODUCTS

2.1 ACCEPTABLE MANUFACTURERS

- A. Pre-fabricated Electric Fireplace:
 - Base: Dimplex Electric Fireplace Glen Dimplex Americas
 1367 Industrial Road Cambridge ON N3H 4W3

1-888-346-7539

- 2. Substitutions not permitted
- 3. Requests for substitutions will be considered in accordance with provisions of Section 01600.



_	Order No. Model No.	500003060 ASP48	
	Notes:		

2.2 ELECTRIC FIREPLACES

A. General:

- 1. Provide all components and accessories required for a complete, functional unit.
- 2. cULus listed, file E71416

- 1. Base Product:
 - a) Dimplex Ignite Aspire Electric Firebox
 - b) Material Number: 500003060
 - c) Model Number: ASP48
 - d) Regulatory model number: 6914180500
- 2. Description: 48" Built-in Portrait Electric Firebox
- 3. Dimensions:
 - a) Width: 48-15/16"/ 124.3 cmb) Height: 49-1/2" / 125.8 cmc) Depth: 17-1/2"/ 44.5 cm
- 4. Framing Dimensions:
 - a) Width: 48 3/4" / 123.9 cmb) Height: 50" / 127 cmc) Depth: 18" / 45.8 cm
- 5. Electrical:
 - a) Volts: 120 V (3-Wire) or 240 V (4-Wire)b) Watts: 1500 W at 120 V, 2500 W at 240 V
 - c) BTUs/hr: 5118 | 8530d) Amps: 12.5/10.4
- 6. Venting: Non-venting
- 7. Operation: Flame only, flame and heat
- 8. Heating: Fan-forced circulation with option to permanently disable the heater
- 9. Liner: Steel
- 10. Standard features:
 - a) NEW patent-pending Dynamic-Fire Flame Effect for remarkably realistic flames.
 - b) NEW patent-pending rhythmic logs with inner glow technology.
 - c) Seamless installation. Enjoy true design versatility with your choice of four installation options in one fireplace: front-facing, left-corner, right-corner, or bay-style, plug kit is included. Trim Installation Kit required (sold separately) for bay and corner installations.
 - d) Flame Connect App takes the increased options of the remote and makes the personalization endless.



Order No. Model No.	500003060 ASP48	
Notes:		

- e) Three natural crackling fire sound options to enhance the ambiance of the fire.
- f) Hardwire capabilities 120V, 240V.
- g) Onboard controls and wall-mountable remote.
- h) Built-in Timer Set for up to 8 hours.
- i) Equipped with integrated self-diagnostic technology that provides maintenance and operation feedback.

11. Control options:

- a) Flame Connect mobile app
- b) Multi-function remote control with wall-mount
- c) Onboard controls (Standby, heat, link)
- d) Built-in power switch

12. Optional Accessories:

- a) Trim Kit 500003783
- b) Other optional accessories available

PART 3 EXECUTION

3.1 INSPECTION

- A. Do not begin installation until substrates have been properly prepared.
- B. If substrate preparation is the responsibility of another installer, notify Architect of unsatisfactory preparation before proceeding.
- C. Verify proper power supply and fuel source are available.

3.2 PREPARATION

- A. Clean surfaces thoroughly prior to installation.
- B. Prepare surfaces using the methods recommended by the manufacturer for achieving the best result for the substrate under the project conditions.


3.3 INSTALLATION


- A. Install in accordance with manufacturer's instructions and requirements of authorities having jurisdiction.
- B. Use manufacturer's guidelines for minimum clearances to combustibles, walls, and finishes.
- C. Anchor all components firmly in position for long life under hard use.
- D. Upon completion of installation, visually inspect all exposed surfaces. Touch up scratches and abrasions with touch up paint recommended by the manufacturer; make imperfections invisible to the unaided eye from a distance of 5 feet (1.5 m).
- E. To use the mobile app, install where a WiFi connection is available.
- F. To install with no heat, refer to user manual (PN, 7216840100), Section 8.

- A. Protect installed products until completion of project.
- B. Touch-up, repair or replace damaged products before Substantial Completion.



Order No. Model No.	500003060 ASP48
Notes:	

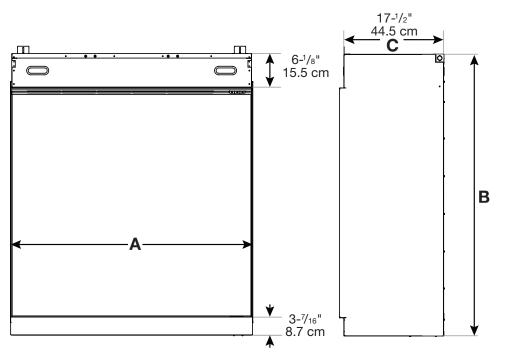

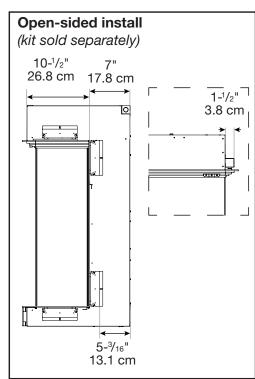

Product ASP48	A WIDTH (in/cm)	B HEIGHT (in/cm)	C DEPTH (in/cm)	VIEWING DIMENSION - WxHxD (in/cm)
Front Install	48-15/16 (124.3)	49-1/2 (125.8)	17-1/2 (44.5)	48 x 40 x 9 (124.3 x 101.6 x 22.9)



Order No. Model No.	500003060 ASP48		
Notes:			

	Width	Height	Depth
Model	A	В	C
ASP30	30-3/4" 78.2 cm	38" 96.6 cm	
ASP36	36-3/4" 93.4 cm	44" 111.8 cm	18"
ASP42	42-3/4" 108.6 cm	47" 119.4 cm	45.8 cm
ASP48	48-3/4" 123.9 cm	50" 127 cm	

Prepare a wall with a framed opening, following the dimensions in the table.

- ♠ CAUTION: This fireplace is NOT load-bearing. Ensure the opening for the fireplace is framed in such a way that the weight of the building materials will not create pressure on the top of the fireplace.
- ! NOTE: Wiring connections are located at the back of the firebox, in the top right corner.

