
Rushmore Truflame 50-inch Direct-Vent Fireplace **DVCT50CBP**



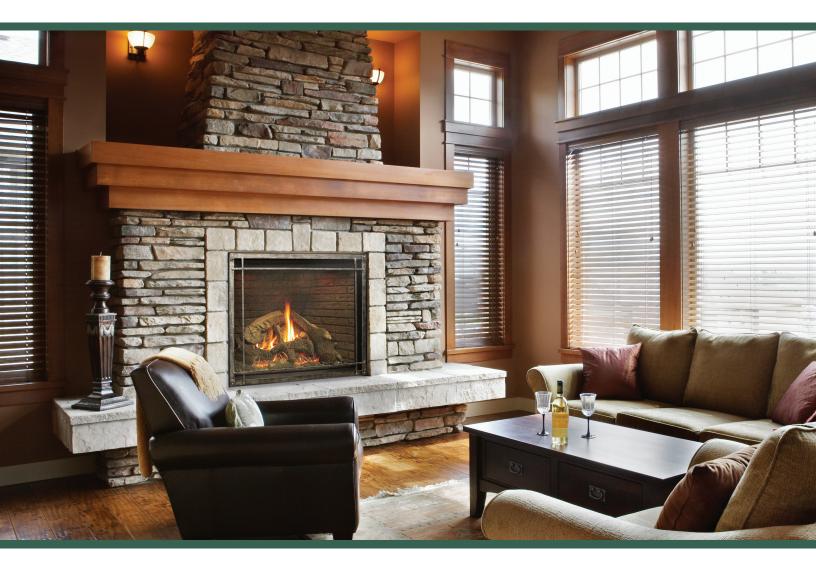

INCLUDES

- TruFlame Technology
- Multi-Function Remote
- Fireplace Barrier Screen
- · Noncombustible Board

REQUIRES

- Liner
- · Log Set: Forest Timber

ACTUAL DIMENSIONS

58" W x 48 1/2" H x 24 3/8" D

GLASS VIEWING AREA

47 3/8" W x 36 1/2" H


TECHNICAL INFORMATION


- Maximum heat output: 56,500 BTUs (Nat), 55,000 BTUs (LP)
- · Weight: 397 lb.
- Clearances
- Back: 0"
- Side Wall: 2"
- Floor: 0"
- Top of Unit: 36"
- Top Framing Edge: 0"
- Type of Gas: LP or Natural
- Iron Pipe Size: 1/2-inch
- Ignition Systems: Multi-Function


FIELD INSTALLED ACCESSORIES


- Liners: Black Porcelain, Traditional Stone, Fire Cracked Brick
- Twin Blower
- Andirons: Matte Black

DVCT50CBP










Clearance to Combustibles (in inches)			
	Distance from Wall Facing	Distance from Top of Opening	
Α	2	12	
В	4	13-5/8	
С	6	15-5/16	
D	8	17	
Е	10	18-5/8	CEILING
F	12	22	COMBUSTIBLES / ALLOWED
			WALL ACING WALL STUD D 10' MIN. 22' MIN. OPENING OF FIREPLACE 72' MIN (CEILING T FIREBOX FACE FLOOR

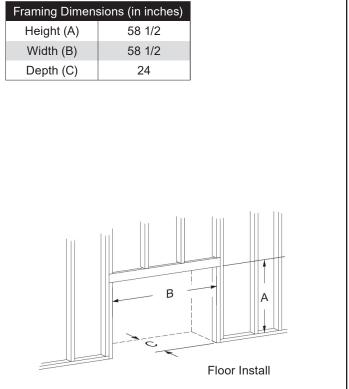

Empire is committed to continuous product improvement; specifications are subject to change without notice. Dimensions in this brochure are approximate; read and follow the framing dimensions in the owners manual supplied with your Empire product. Flame size, shape, and color will vary from photos. Our mantels feature natural veneers and hand-rubbed finishes – wood grain and color will vary. Adjust light levels and use "natural light" incandescent bulbs to enhance the dramatic look for your wooden mantel.

Member of the following industry associations:









This appliance is design-certified to the ANSI standard by:







SINCE 1932
Empire Comfort Systems Inc.

918 Freeburg Ave.
Belleville, IL 62220-2623
info@empirecomfort.com
04/19