Tahoe Direct-Vent Clean-Face Deluxe Fireplace DVD32FP





INCLUDES

• 5-piece Ceramic Fiber log set on Slope Glaze Burner

REQUIRES

 Fireplace Barrier Screen or Door Set and Frame with Barrier Screen

ACTUAL DIMENSIONS

34" W x 32 3/4" H x 16 3/8" D

GLASS VIEWING AREA


27 1/2" W x 20" H


TECHNICAL INFORMATION


- Maximum heat output: 18,000 BTU (LP, Nat)
- · Efficiency Rating:
- 58.92% A. F. U. E
- 57.90% P4
- · Weight: 96 lbs.
- · Clearances:
- Side Wall: 0"
- Top Trim: 0"
- Type of Gas: LP or Natural
- Iron Pipe Size: 1/2-inch
- Ignition Systems: Intermittent Pilot or Millivolt
- Vent Size: 4 x 6 inch
- · Top or Rear Vent


- Liners: Aged Brick, Banded Brick, Black Porcelain, Herringbone, Stacked Limestone
- Blower, Automatic
- Barriers:
- Door Frame with Matte Black Barrier or Matte Black Barrier
- Decorative Doors & Frames: Arch, Rectangle, Mission Arch and Mission Rectangle

DVD32FP










24 1/2 Center

Back	nbustibles (in inches) 0 (0 mm)	
Side	0 (0 mm)	
Floor	0 (0 mm)	
Top Stand-off	0 (0 mm)	
Top Framing Edge	3 (76 mm)	
SEE MANTLE CHART FOR MINIMUM HEIGHT OF MANTLE ABOVE UNI FINISHED WALL (COMBUSTIBLE) NON-COMBUSTIBLE FIRST 6" (SEE MAGNIFIED VIEW) TOP FRAMING LEDGE GLASS FRONT		HT

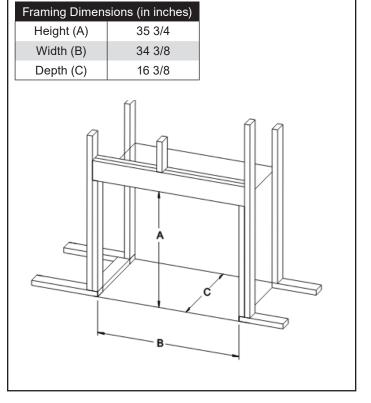

Empire is committed to continuous product improvement; specifications are subject to change without notice. Dimensions in this brochure are approximate; read and follow the framing dimensions in the owners manual supplied with your Empire product. Flame size, shape, and color will vary from photos. Our mantels feature natural veneers and hand-rubbed finishes – wood grain and color will vary. Adjust light levels and use "natural light" incandescent bulbs to enhance the dramatic look for your wooden mantel.

Member of the following industry associations:









This appliance is design-certified to the ANSI standard by:







SINCE 1932

Empire Comfort Systems Inc. 918 Freeburg Ave. Belleville, IL 62220-2623 info@empirecomfort.com

Tahoe Direct-Vent Clean-Face Deluxe Fireplace DVD36FP





INCLUDES

• 5-piece Ceramic Fiber log set

REQUIRES

 Fireplace Barrier Screen or Door Set and Frame with Barrier Screen

ACTUAL DIMENSIONS

37" W x 32 3/4" H x 16 3/8" D

GLASS VIEWING AREA


30 1/2" W x 20" H


TECHNICAL INFORMATION


- Maximum heat output: 20,000 BTU (LP, Nat)
- · Efficiency Rating:
- 56.80% A. F. U. E.
- 55.80% P4
- · Weight: 102 lbs.
- Clearances:
- Side Wall: 0"
- Top Trim: 0"
- Type of Gas: LP or Natural
- Iron Pipe Size: 1/2-inch
- Ignition Systems: Intermittent Pilot, Millivolt
- · Vent Size: 4 x 6 inch


- Liners: Aged Brick, Black Porcelain, Herringbone Brick, Stacked Limestone
- Barriers: Door Frame with Matte Black Barrier, Matte Black Barrier
- Decorative Doors & Frames: Arch, Rectangle, Mission Arch and Mission Rectangle

DVD36FP










Back	oustibles (in inches) 0 (0 mm)	
Side	0 (0 mm)	
Floor	0 (0 mm)	
Top Stand-off	0 (0 mm)	
Top Framing Edge	3 (76 mm)	
SEE MANTLE CHART FOR MINIMUM HEIGHT OF MANTLE ABOVE UNIT FINISHED WALL (COMBUSTIBLE) NON-COB' (SEE MAGNIFIED VIEW) TOP FRAMING LEDGE	STAND OFF (152mm) HI ABOVE TOP OF FIREPLACE	

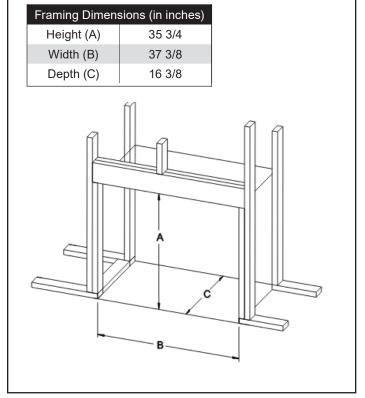

Empire is committed to continuous product improvement; specifications are subject to change without notice. Dimensions in this brochure are approximate; read and follow the framing dimensions in the owners manual supplied with your Empire product. Flame size, shape, and color will vary from photos. Our mantels feature natural veneers and hand-rubbed finishes – wood grain and color will vary. Adjust light levels and use "natural light" incandescent bulbs to enhance the dramatic look for your wooden mantel.

Member of the following industry associations:









This appliance is design-certified to the ANSI standard by:







since 1932

Empire Comfort Systems Inc. 918 Freeburg Ave. Belleville, IL 62220-2623 info@empirecomfort.com 01/18

Tahoe Direct-Vent Clean-Face Deluxe Fireplace DVD42FP





INCLUDES

• 7-piece Ceramic Fiber log set

REQUIRES

• Fireplace Barrier Screen or Door Set and Frames with Barrier Screen

ACTUAL DIMENSIONS

43" W x 34 3/4" H x 16 3/8" D

GLASS VIEWING AREA


36 1/2" W x 22" H


TECHNICAL INFORMATION


- Maximum heat output: 25,000 BTU (LP, Nat)
- · Efficiency Rating:
- 63.42% A. F. U. E.
- -62.30% P4
- · Weight: 121 lbs.
- · Clearances:
- Side Wall: 0"
- Top Trim: 0"
- Type of Gas: LP or Natural
- Iron Pipe Size: 1/2-inch
- Ignition Systems: Intermittent Pilot, Millivolt
- · Vent Size: 4 x 6 inch


- Liners: Aged Brick, Black Porcelain, Herringbone Brick,
- Stacked Limestone
- Barriers: Door Frame with Matte Black Barrier, Matte Black Barrier
- Decorative Doors & Frames: Arch, Rectangle, Mission Arch, Mission Rectangle

DVD42FP










Clearance to Comb	bustibles (in inches)
Back	0 (0 mm)
Side	0 (0 mm)
Floor	0 (0 mm)
Top Stand-off	0 (0 mm)
Top Framing Edge	3 (76 mm)
SEE MANTLE CHART FOR MINIMUM HEIGHT OF MANTLE ABOVE UNIT FINISHED WALL (COMBUSTIBLE (COMBUSTIBLE) NON-COMBUSTIBLE FIRST 6" (SEE MAGNIFIED VIEW) TOP FRAMING LEDGE GLASS FRONT	STAND OFF 6" (15/2mm) HEIGHT ABOVE TOP OF FIREPLACE NAILING FLANGES

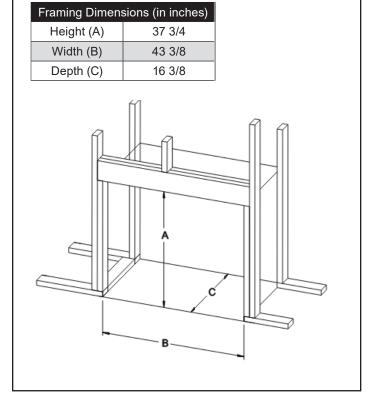

Empire is committed to continuous product improvement; specifications are subject to change without notice. Dimensions in this brochure are approximate; read and follow the framing dimensions in the owners manual supplied with your Empire product. Flame size, shape, and color will vary from photos. Our mantels feature natural veneers and hand-rubbed finishes – wood grain and color will vary. Adjust light levels and use "natural light" incandescent bulbs to enhance the dramatic look for your wooden mantel.

Member of the following industry associations:













This appliance is design-certified



since 1932

Empire Comfort Systems Inc. 918 Freeburg Ave. Belleville, IL 62220-2623 info@empirecomfort.com 01/18

Tahoe Direct-Vent Clean-Face Deluxe Fireplace DVD48FP





INCLUDES

• 7-piece Ceramic Fiber log set

REQUIRES

• Fireplace Barrier Screen or Door Set and Frames with Barrier Screen

ACTUAL DIMENSIONS

49" W x 34 3/4" H x 16 3/8" D


GLASS VIEWING AREA

42 1/2" W x 22" H


TECHNICAL INFORMATION


- Maximum heat output: 28,000 BTU (LP, Nat)
- · Efficiency Rating:
- 63.43% A. F. U. E.
- 62.50% P4
- · Weight: 135 lbs.
- Clearances:
- Side Wall: 0"
- Top Trim: 0"
- Type of Gas: LP or Natural
- Iron Pipe Size: 1/2-inch
- Ignition Systems: Intermittent Pilot, Millivolt
- · Vent Size: 4 x 6 inch

- Liners: Aged Brick, Black Porcelain, Herringbone Brick, Stacked Limestone
- Barriers: Door Frame with Matte Black Barrier, Matte Black Barrier
- Decorative Doors & Frames: Arch, Rectangle, Mission Arch and Mission Rectangle

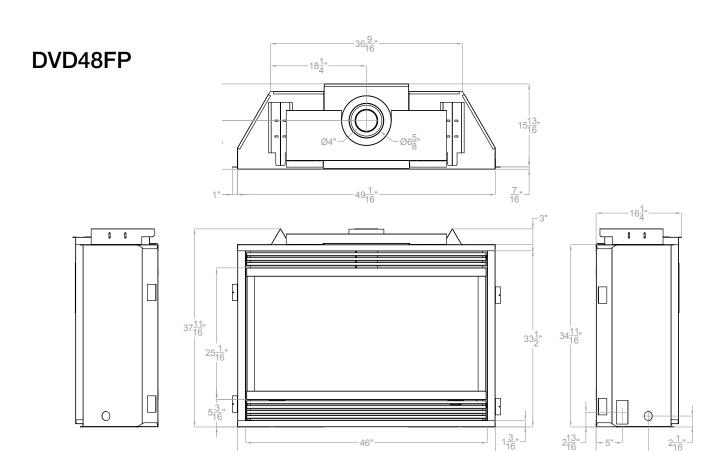

49<u>1</u>

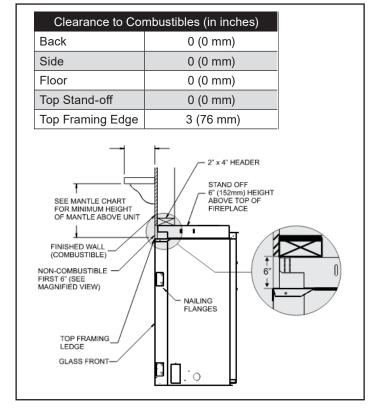

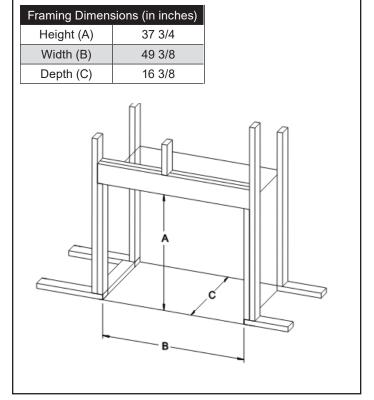

Empire is committed to continuous product improvement; specifications are subject to change without notice. Dimensions in this brochure are approximate; read and follow the framing dimensions in the owners manual supplied with your Empire product. Flame size, shape, and color will vary from photos. Our mantels feature natural veneers and hand-rubbed finishes – wood grain and color will vary. Adjust light levels and use "natural light" incandescent bulbs to enhance the dramatic look for your wooden mantel.

Member of the following industry associations:









This appliance is design-certified to the ANSI standard by:







since 1932

Empire Comfort Systems Inc. 918 Freeburg Ave. Belleville, IL 62220-2623 info@empirecomfort.com