



2

1

POWER REQUIREMENTS	SIT VARIABLE 4X AA BATTERY - 6v	DEXEN 2X D-CELL BATTERY - 3v	
PRESSURE		NATURAL GAS	PROPANE
	MINIMUM	5 IN. OF W.C	11 IN. OF W.C
	MANIFOLD	3.5 IN. OF W.C	10.5 IN. OF W.C
	MAXIMUM	10.5 IN. OF W.C	14 IN. OF W.C
HEAT	HIGH BTU (ALL)	40,000 BTU [11.72 kW]	
	LOW BTU (VEN)	25,000 BTU [7.32 kW]	
	LOW BTU (VEP)	18,000 BTU [5.27 kW]	
ACTIVE EMBER BED	OUTDOOR COVERED PATIO	STEEL CONSTRUCTION	BLACK COATING
PLATNIUM EMBERS	BLACK EMBERS	LAVA ROCK	GLOWFIRE LOGS
LOG SPECIES			
GFWOC18	18" GLOWFIRE ARIZONA WEATHERED OAK CHARRED LOGS		
MINIMUM FIRE BOX DIM. (INCHES)			
FRONT	REAR	DEPTH	HEIGHT
28	18	16	22

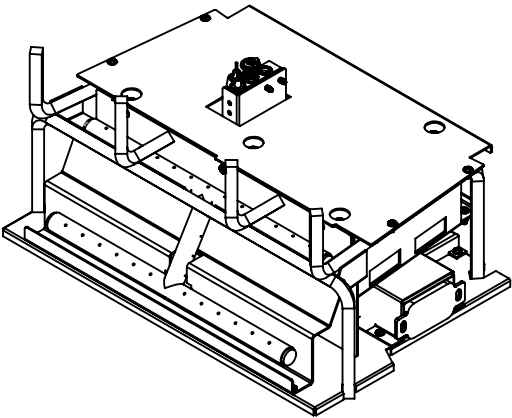


LEFT VIEW




GAS INLET

RIGHT VIEW

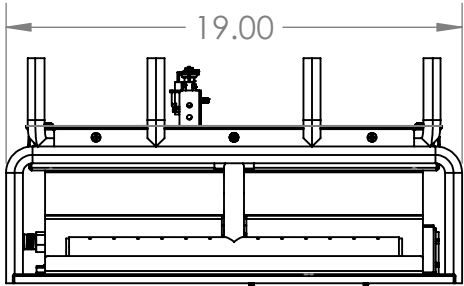

*LAFV-18-VEN SHOWN

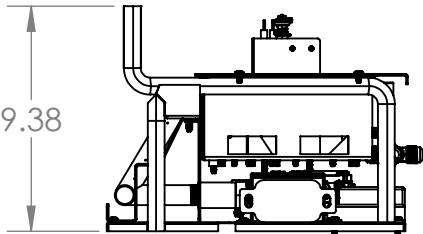

BATTERY PACK

NOTE:
LAFV-18-XX
EN - ELECTRONIC (DEXEN) NATURAL GAS
EP- ELECTRONIC (DEXEN) PROPANE
VEN - VARIABLE ELECTRONIC (SIT) NATURAL GAS
VEP- VARIABLE ELECTRONIC (SIT) PROPANE




TITLE:
18 IN. LAVA FRONT VIEW
BATTERY ELECTRONIC
IGNITION

SIZE	DWG. NO.	REV
A	LAFV-18-XX	A
SCALE: N/A WEIGHT:		SHEET 1 OF 1

2


1

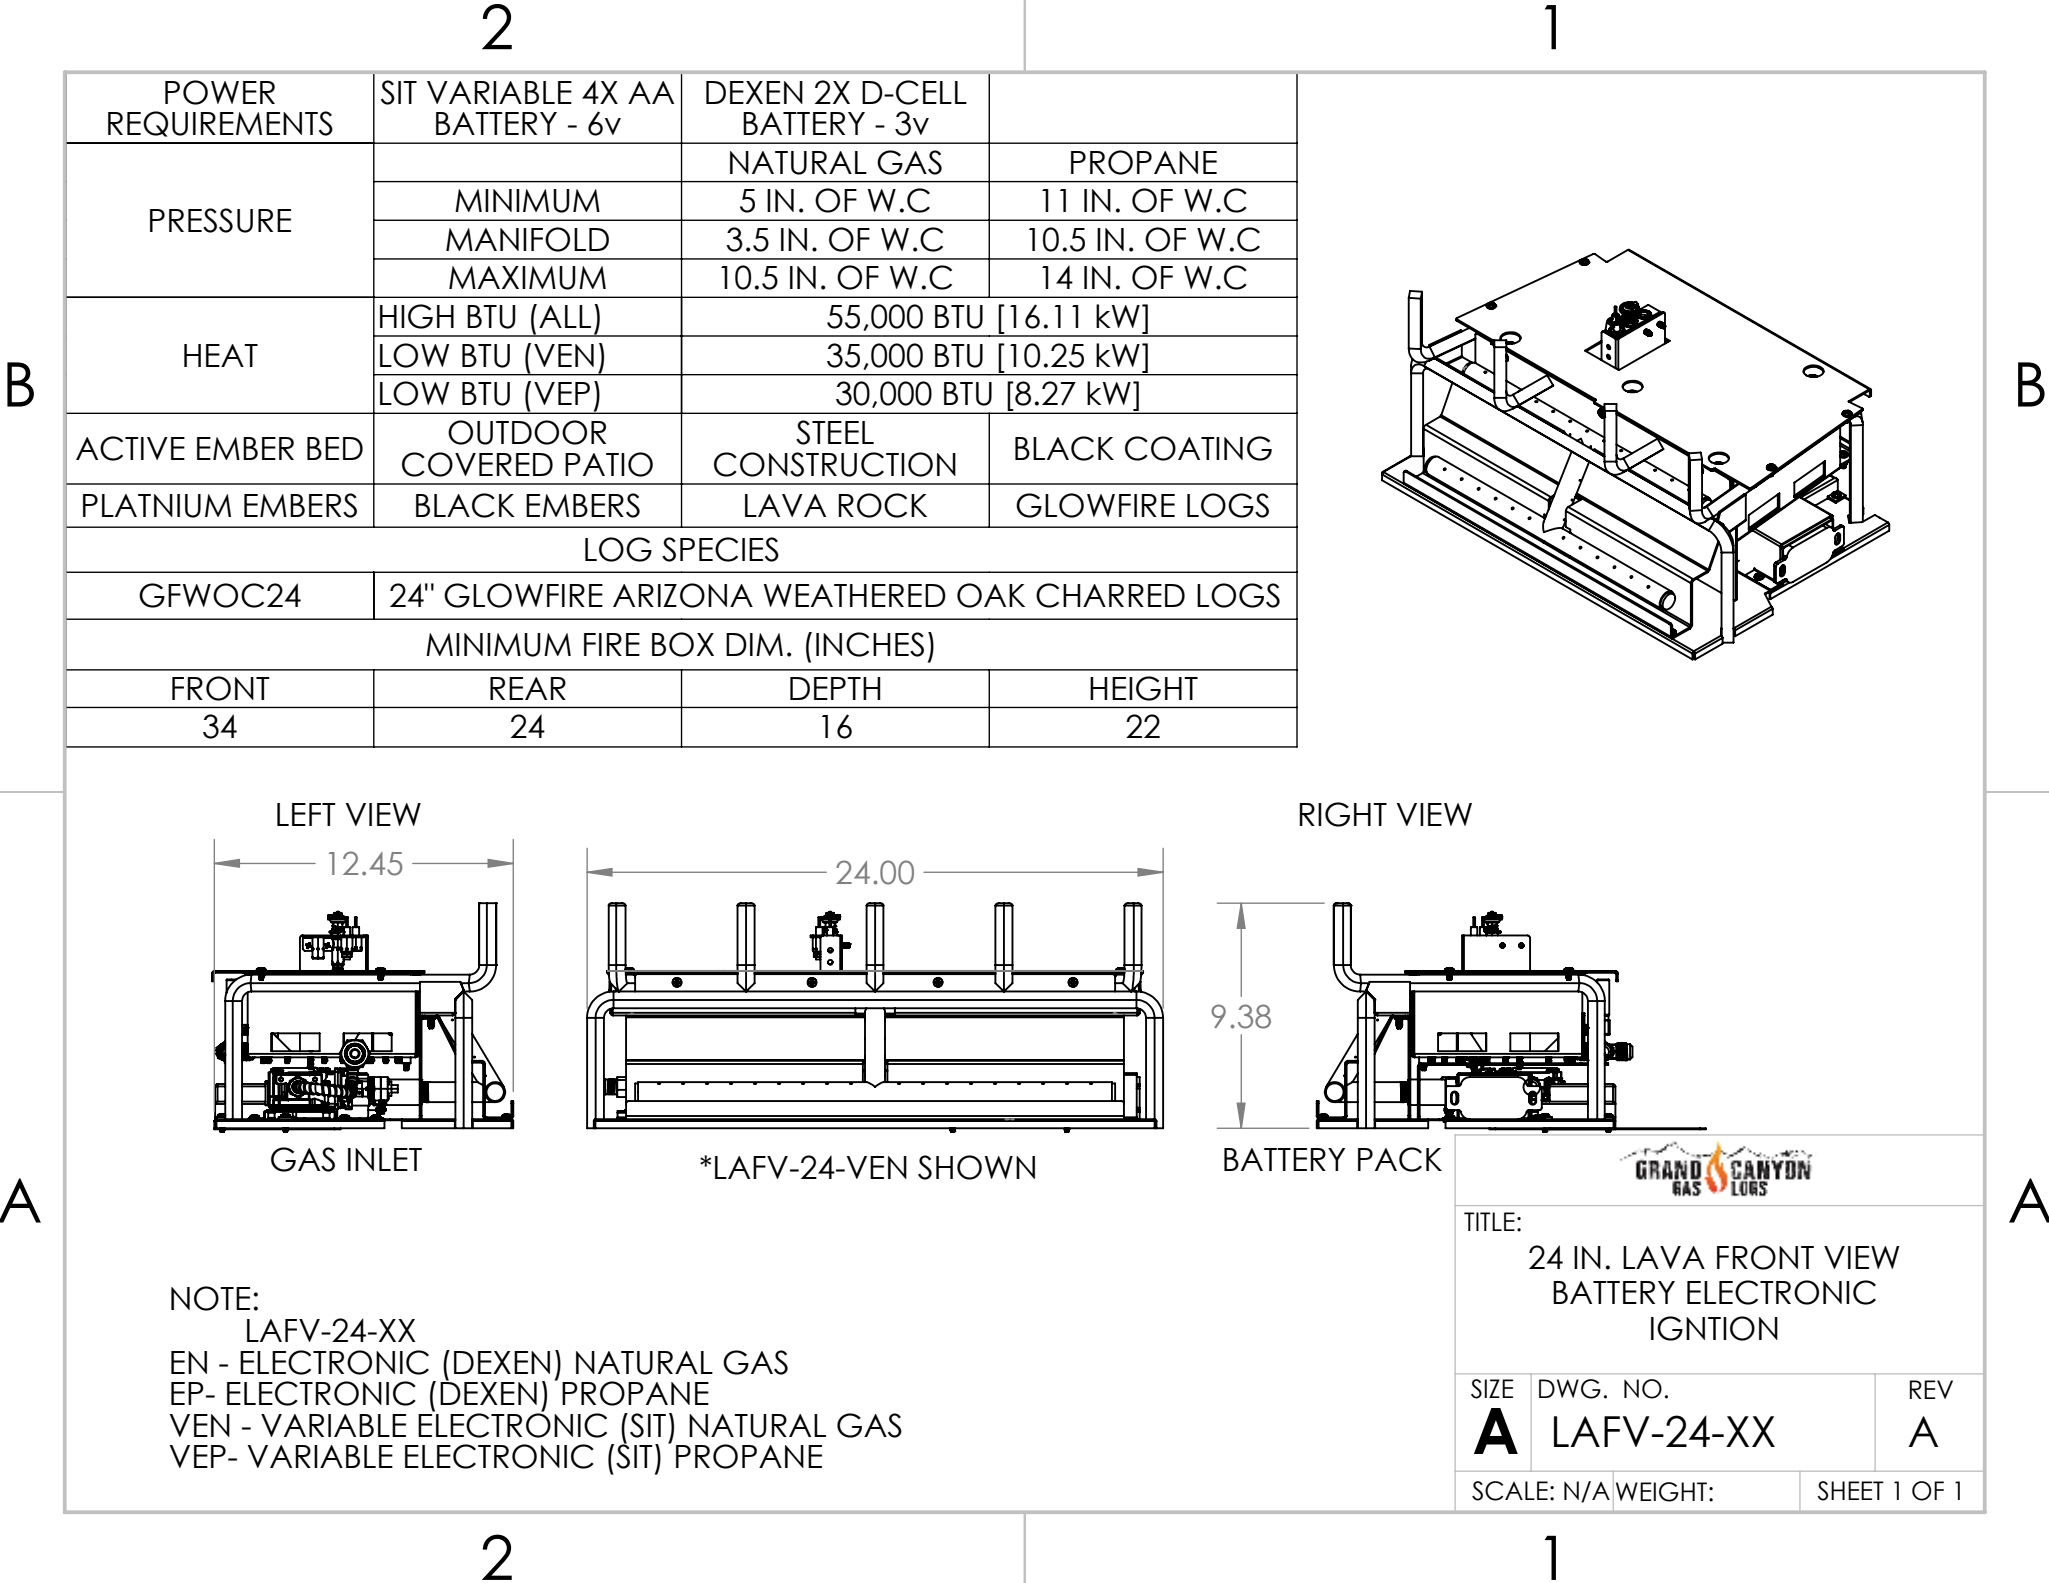


2

1


POWER REQUIREMENTS	SIT VARIABLE 4X AA BATTERY - 6v	DEXEN 2X D-CELL BATTERY - 3v	
PRESSURE		NATURAL GAS	PROPANE
	MINIMUM	5 IN. OF W.C	11 IN. OF W.C
	MANIFOLD	3.5 IN. OF W.C	10.5 IN. OF W.C
	MAXIMUM	10.5 IN. OF W.C	14 IN. OF W.C
HEAT	HIGH BTU (ALL)	75,000 BTU [21.98 kW]	
	LOW BTU (VEN)	45,000 BTU [13.18 kW]	
	LOW BTU (VEP)	40,000 BTU [11.72 kW]	
ACTIVE EMBER BED	OUTDOOR COVERED PATIO	STEEL CONSTRUCTION	BLACK COATING
PLATNIUM EMBERS	BLACK EMBERS	LAVA ROCK	GLOWFIRE LOGS
LOG SPECIES			
GFWOC30	30" GLOWFIRE ARIZONA WEATHERED OAK CHARRED LOGS		
MINIMUM FIRE BOX DIM. (INCHES)			
FRONT	REAR	DEPTH	HEIGHT
40	30	18	26

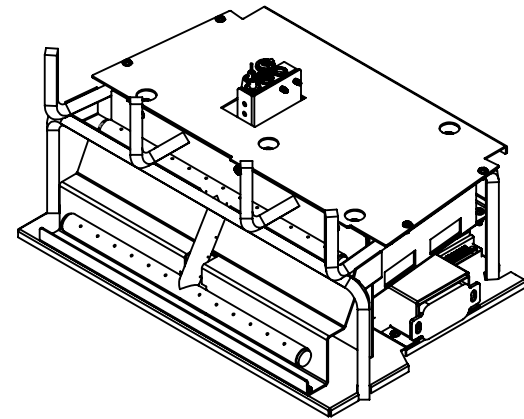


LEFT VIEW

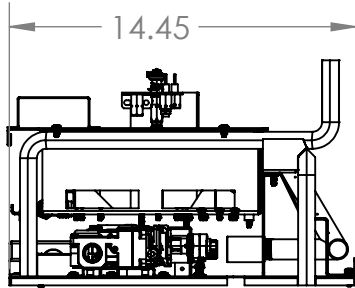

30.00

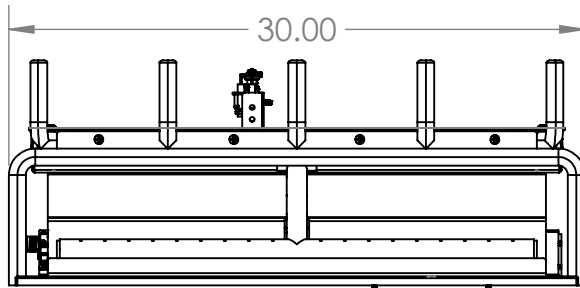

RIGHT VIEW

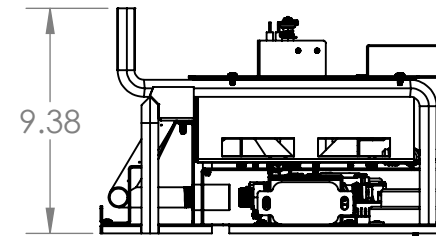

9.38

GAS INLET

*LAFV-30-VEN SHOWN

BATTERY PACK

NOTE:

LAFV-24-XX

EN - ELECTRONIC (DEXEN) NATURAL GAS

EP- ELECTRONIC (DEXEN) PROPANE

VEN - VARIABLE ELECTRONIC (SIT) NATURAL GAS

VEP- VARIABLE ELECTRONIC (SIT) PROPANE



TITLE:

30 IN. LAVA FRONT VIEW
BATTERY ELECTRONIC
IGNITION

SIZE

A

DWG. NO.

LAFV-30-XX

REV

A

SCALE: N/A WEIGHT:

SHEET 1 OF 1



2

1


2

1


POWER REQUIREMENTS	SIT VARIABLE 4X AA BATTERY - 6v	DEXEN 2X D-CELL BATTERY - 3v	
PRESSURE		NATURAL GAS	PROPANE
	MINIMUM	5 IN. OF W.C	11 IN. OF W.C
	MANIFOLD	3.5 IN. OF W.C	10.5 IN. OF W.C
	MAXIMUM	10.5 IN. OF W.C	14 IN. OF W.C
HEAT	HIGH BTU (ALL)	85,000 BTU [24.91 kW]	
	LOW BTU (VEN)	55,000 BTU [16.11 kW]	
	LOW BTU (VEP)	48,000 BTU [14.06 kW]	
ACTIVE EMBER BED	OUTDOOR COVERED PATIO	STEEL CONSTRUCTION	BLACK COATING
PLATNIUM EMBERS	BLACK EMBERS	LAVA ROCK	GLOWFIRE LOGS
LOG SPECIES			
GFWOC36	36" GLOWFIRE ARIZONA WEATHERED OAK CHARRED LOGS		
MINIMUM FIRE BOX DIM. (INCHES)			
FRONT	REAR	DEPTH	HEIGHT
46	36	18	26

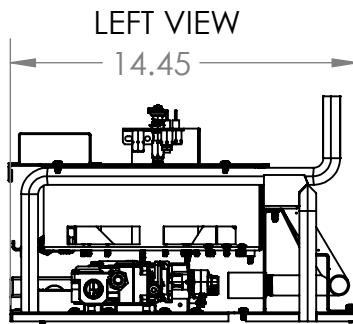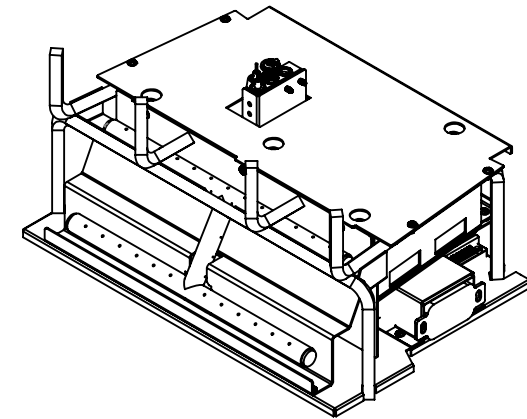

LEFT VIEW

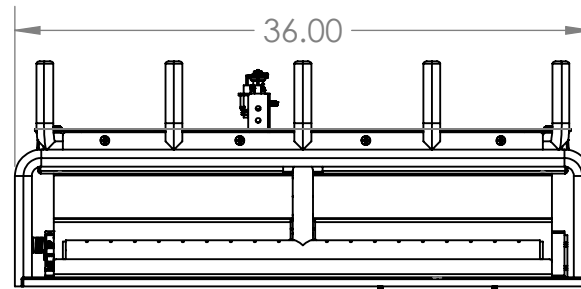

36.00

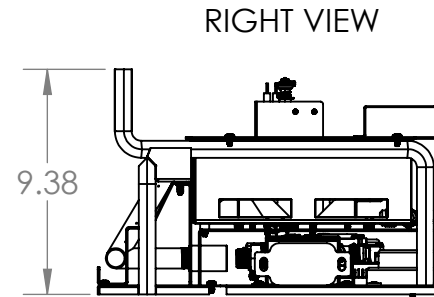

RIGHT VIEW

9.38

GAS INLET

*LAFV-36-VEN SHOWN

BATTERY PACK

NOTE:

LAFV-24-XX

EN - ELECTRONIC (DEXEN) NATURAL GAS

EP- ELECTRONIC (DEXEN) PROPANE

VEN - VARIABLE ELECTRONIC (SIT) NATURAL GAS

VEP- VARIABLE ELECTRONIC (SIT) PROPANE



TITLE:

36 IN. LAVA FRONT VIEW
BATTERY ELECTRONIC
IGNITION

SIZE

A

DWG. NO.

LAFV-36-XX

REV

A

SCALE: N/A WEIGHT:

SHEET 1 OF 1

2

1