

DELRAY

LINEAR

ELEGANTLY SIMPLE

DRL3613
DRL4813

SINGLE SIDED
DIRECT VENT

QUICK DIMENSIONS

	DRL3613		DRL4813	
	UNIT	FRAM.	UNIT	FRAM.
F.WIDTH	45 $\frac{1}{4}$	43 $\frac{3}{8}$	57 $\frac{1}{4}$	55 $\frac{3}{8}$
B.WIDTH	41 $\frac{3}{8}$	43 $\frac{3}{8}$	53 $\frac{1}{16}$	55 $\frac{3}{8}$
HEIGHT	26 $\frac{3}{4}$	33 $\frac{11}{16}$	26 $\frac{3}{4}$	33 $\frac{11}{16}$
DEPTH	12 $\frac{3}{4}$	14 $\frac{1}{4}$	12 $\frac{3}{4}$	14 $\frac{1}{4}$
VIEWING	36 $\frac{1}{2}$ x 14 $\frac{11}{16}$		48 $\frac{1}{2}$ x 14 $\frac{11}{16}$	

DELRAY FULL LOAD LINEAR

Standard

Concealed burner with
Ice fireglass

Multi-function
remote control

Remote controlled fans

Micro mesh safety screen

Black reflective glass

Halogen downlighting

Battery backup

Cement board

Options

Propane conversion kit

Adjustable trim kits

Speckled stones,
driftwood, glass media

Heat management

WiFi phone app control

DELRAY BASIC LINEAR

Standard

Concealed burner with
Ice fireglass

Cement board

Options

Remote control

Fans

Micro mesh safety screen

Black reflective glass

Propane conversion kit

Adjustable trim kits

Battery backup

Speckled stones,
driftwood, glass media

Heat management

BTU LISTING

DRL3613NI-2 / 16,000
DRL3613LI-2 / 16,000

DRL4813NI-2 / 21,000
DRL4813LI-2 / 19,000
BTU is the same for basic and for
fully loaded units

EFFICIENCY P.4. 1-15


DRL3613NI / 71%
DRL3613NI-2 / 71%
DRL3613LI / 71%
DRL3613LI-2 / 71%

DRL4813NI / 63%
DRL4813NI-2 / 63%
DRL4813LI / 60%
DRL4813LI-2 / 60%





DELRAY DIMENSIONS

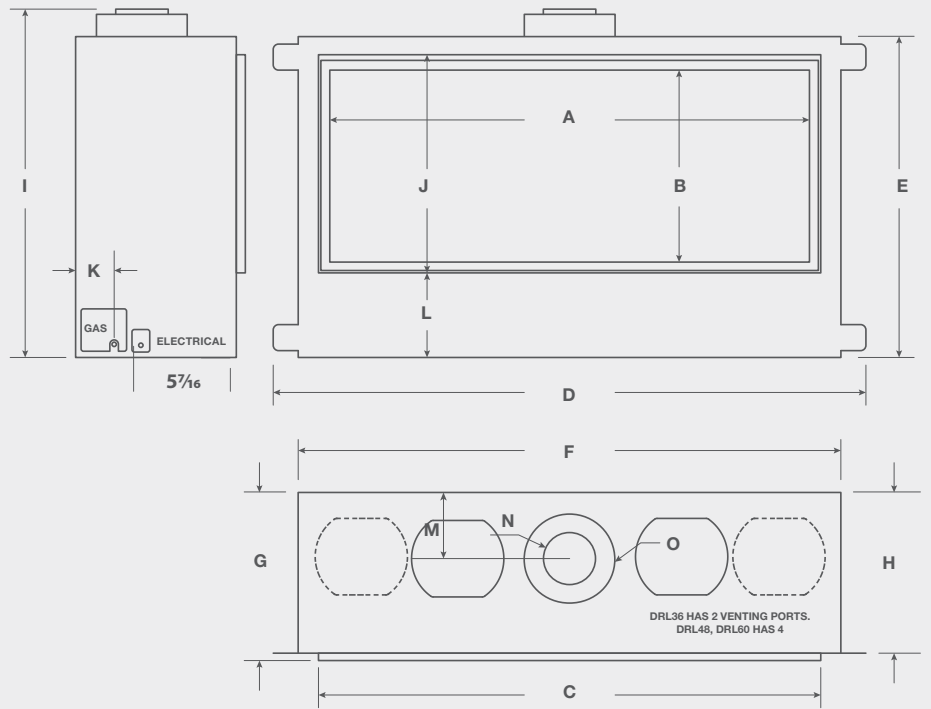

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O
DRL36	36½	14⅛	38¾	45¼	24¼	41¾	12¾	12⅝	26¾	16⅝	3⅝	6⅞	5	4	7
DRL48	48½	14⅛	50⅞	57¼	24½	53⅞	12¾	12⅝	26¾	16⅝	3⅝	6⅞	5	4	7



MONTIGO / DELRAY / LINEAR / DRL4813NI-2 / DRIFTWOOD SPECKLED STONES



MONTIGO / DELRAY / LINEAR / DRL3613NI-2 / ICE FIREGLASS / REFLECTIVE BLACK GLASS




REMOTE†
RX200**

†Standard for full load units
*Full load units only



WALL REMOTE†
EC1550



WIFI PHONE APP
CONTROL†
SIT-WIFI



BLACK GLASS†
RBGDRL**



DOWNLIGHTING††
SIT-WIFI



TRIM KIT
DRLT**.*

Unit Specifications

ICON LEGEND

AVAILABLE

+

NOT AVAILABLE

-

DEDICATED


◊

STANDARD

◊

	BTU NATURAL GAS	BTU LIQUID PROPANE	NG EFFICIENCY	LP EFFICIENCY	VENTING	CLEARANCE TOP	CLEARANCE SIDES	CLEARANCE BACK	CLEARANCE FLOOR	FRONT VIEWING AREA	FRONT GLASS TYPE	STANDARD MEDIA	MICRO MESH SAFETY SCREEN	POWERVENT	REMOTE CONTROL	FANS	UPLIGHTING	DOWNLIGHTING
DRL3613*I-2	16,000	16,000	71%	71%	4"/7"	21	1	2	0	36½ X 14 ¹¹ / ₁₆	HIGH TEMPERATURE	HW1157	◊	+	◊	◊	-	◊
DRL3613*I	16,000	16,000	71%	71%	4"/7"	21	1	2	0	36½ X 14 ¹¹ / ₁₆	HIGH TEMPERATURE	HW1157	+	+	+	-	-	-
DRL4813*I-2	21,000	19,000	63%	60%	4"/7"	21	1	2	0	48½ X 14 ¹¹ / ₁₆	HIGH TEMPERATURE	HW1157	◊	+	◊	◊	-	◊
DRL4813*I	21,000	19,000	63%	60%	4"/7"	21	1	2	0	48½ X 14 ¹¹ / ₁₆	HIGH TEMPERATURE	HW1157	+	+	+	-	-	-
DRL6013*I-2	28 000	25 000	64%	64%	4"/7"	36	1¾	2	0	60½ X 14 ¹¹ / ₁₆	HIGH TEMPERATURE	HW1157	◊	+	◊	◊	-	◊
DRL6013*I	28 000	25 000	67%	64%	4"/7"	36	1¾	2	0	60½ X 14 ¹¹ / ₁₆	HIGH TEMPERATURE	HW1157	+	+	+	+	-	-
DRL7213*I-2	35 000	32 000	64%	66%	5"/8"	38½	1¾	2	0	72½ X 14 ¹¹ / ₁₆	HIGH TEMPERATURE	HW1157	◊	+	◊	◊	-	◊
DRL7213*I	35 000	32 000	66%	67%	5"/8"	38½	1¾	2	0	72½ X 14 ¹¹ / ₁₆	HIGH TEMPERATURE	HW1157	+	+	+	+	-	-

DELRAY LINEAR FRAMING

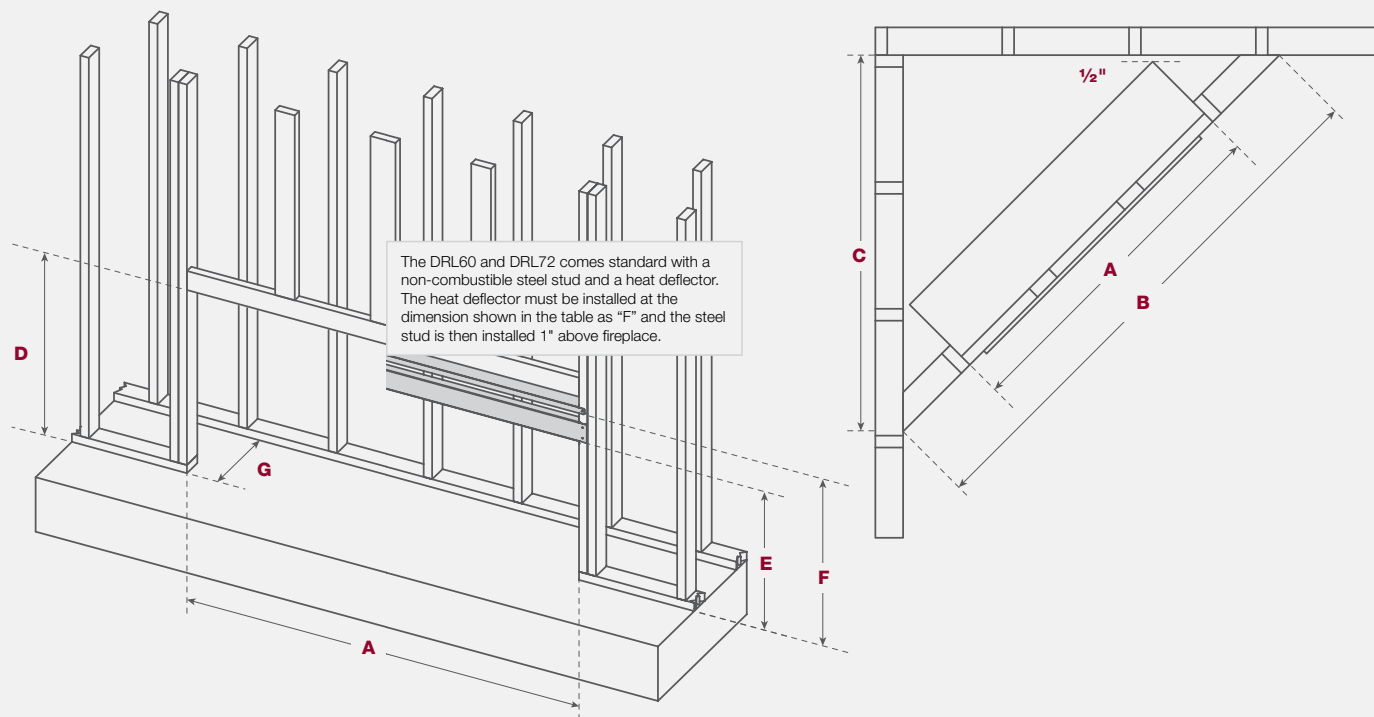

	A	B	C	D	E	F	G
DRL3613	43¾	67¾	47½	33 ¹¹ / ₁₆	N/A	N/A	14¼
DRL4813	55¾	79¼	56½	33 ¹¹ / ₁₆	N/A	N/A	14¼
DRL6013	68 ¹⁵ / ₁₆	91¾	64½	33 ¹¹ / ₁₆	25½	30 ¹¹ / ₁₆	14¼
DRL7213	81	106¾	78¾	33 ¹¹ / ₁₆	26½	30 ¹¹ / ₁₆	16



DELRAY

LINEAR

ELEGANTLY SIMPLE

DELRAY / FROM MINIMALIST TO INDULGENCE

DRL6013

DRL7213

SINGLE SIDED
DIRECT VENT

QUICK DIMENSIONS

	DRL6013		DRL7213	
	UNIT	FRAM.	UNIT	FRAM.
F.WIDTH	69 ¹ / ₄	68 ¹⁵ / ₁₆	82 ³ / ₄	81
B.WIDTH	65 ⁷ / ₁₆	68 ¹⁵ / ₁₆	77 ⁷ / ₁₆	81
HEIGHT	26 ³ / ₄	33 ¹¹ / ₁₆	27	33 ¹¹ / ₁₆
DEPTH	12 ³ / ₄	14 ¹ / ₄	14 ⁷ / ₁₆	16
VIEWING	60 ¹ / ₂ x 14 ¹¹ / ₁₆		72 ¹ / ₂ x 14 ¹¹ / ₁₆	

DELRAY FULL LOAD LINEAR

Standard

Concealed burner with Ice fireglass

Multi-function remote control

Remote Hi-Lo flame

Remote controlled fans

Micro mesh safety screen

Black reflective glass

Halogen downlighting

Battery backup

Cement board

Options

Propane conversion kit

Adjustable trim kits

Speckled stones, driftwood, glass media

Heat management

WiFi phone app control

DELRAY BASIC LINEAR

Standard

Concealed burner with Ice fireglass

Cement board

Options

Remote control

Fans

Micro mesh safety screen

Black reflective glass

Propane conversion kit

Adjustable trim kits

Battery backup

Speckled stones, driftwood, glass media

Heat management

BTU LISTING

DRL6013NI-2 / 28,000
DRL6013LI-2 / 25,000

DRL7213NI-2 / 35,000
DRL7213LI-2 / 32,000
BTU is the same for basic and for fully loaded units

EFFICIENCY P.4. 1-15


DRL6013NI / 67%
DRL6013NI-2 / 64%
DRL6013LI / 66%
DRL6013LI-2 / 64%

DRL7213NI / 66%
DRL7213NI-2 / 64%
DRL7213LI / 67%
DRL7213LI-2 / 66%





DELRAY DIMENSIONS

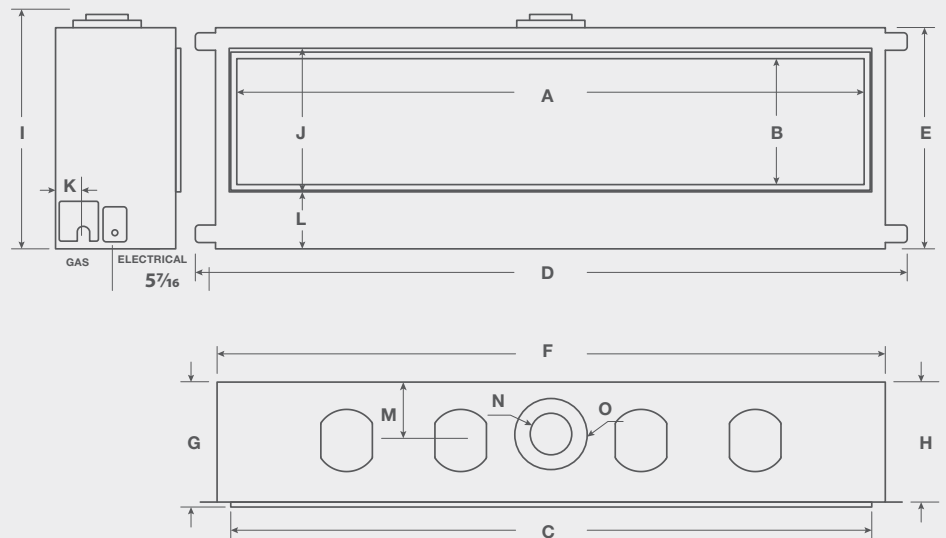

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O
DRL60	60½	14½	62½	69¼	24½	65½	12¾	12½	26¾	16½	3½	6½	5	4	7
DRL72	72½	14½	74¾	82¾	25½	77½	14¾	13½	27	16½	3½	6½	5½	5	8

MONTIGO / DELRAY / LINEAR / DRL6013NI / DRIFTWOOD SPECKLED STONES




REMOTE⁺
RX200**

[†]Standard for full load units
[‡]Full load units only



WALL REMOTE⁺
EC1550



WIFI PHONE APP
CONTROL⁺
SIT-WIFI



BLACK GLASS⁺
RBGDRL**



DOWNLIGHTING⁺
SIT-WIFI



TRIM KIT
DRLT**.*

Unit Specifications

ICON LEGEND

AVAILABLE

+

NOT AVAILABLE

-

DEDICATED


◊

STANDARD

◊

	BTU NATURAL GAS	BTU LIQUID PROPANE	NG EFFICIENCY	LP EFFICIENCY	VENTING	CLEARANCE TOP	CLEARANCE SIDES	CLEARANCE BACK	CLEARANCE FLOOR	FRONT VIEWING AREA	FRONT GLASS TYPE	STANDARD MEDIA	MICRO MESH SAFETY SCREEN	POWERVENT	REMOTE CONTROL	FANS	UPLIGHTING	DOWNLIGHTING
DRL3613*I-2	16,000	16,000	71%	71%	4"/7"	21	1	2	0	36½ X 14⅞	HIGH TEMPERATURE	HW1157	◊	+	◊	◊	-	◊
DRL3613*I	16,000	16,000	71%	71%	4"/7"	21	1	2	0	36½ X 14⅞	HIGH TEMPERATURE	HW1157	+	+	+	-	-	-
DRL4813*I-2	21,000	19,000	63%	60%	4"/7"	21	1	2	0	48½ X 14⅞	HIGH TEMPERATURE	HW1157	◊	+	◊	◊	-	◊
DRL4813*I	21,000	19,000	63%	60%	4"/7"	21	1	2	0	48½ X 14⅞	HIGH TEMPERATURE	HW1157	+	+	+	-	-	-
DRL6013*I-2	28 000	25 000	64%	64%	4"/7"	36	1¾	2	0	60½ X 14⅞	HIGH TEMPERATURE	HW1157	◊	+	◊	◊	-	◊
DRL6013*I	28 000	25 000	67%	64%	4"/7"	36	1¾	2	0	60½ X 14⅞	HIGH TEMPERATURE	HW1157	+	+	+	+	-	-
DRL7213*I-2	35 000	32 000	64%	66%	5"/8"	38½	1¾	2	0	72½ X 14⅞	HIGH TEMPERATURE	HW1157	◊	+	◊	◊	-	◊
DRL7213*I	35 000	32 000	66%	67%	5"/8"	38½	1¾	2	0	72½ X 14⅞	HIGH TEMPERATURE	HW1157	+	+	+	+	-	-

DELRAY LINEAR FRAMING

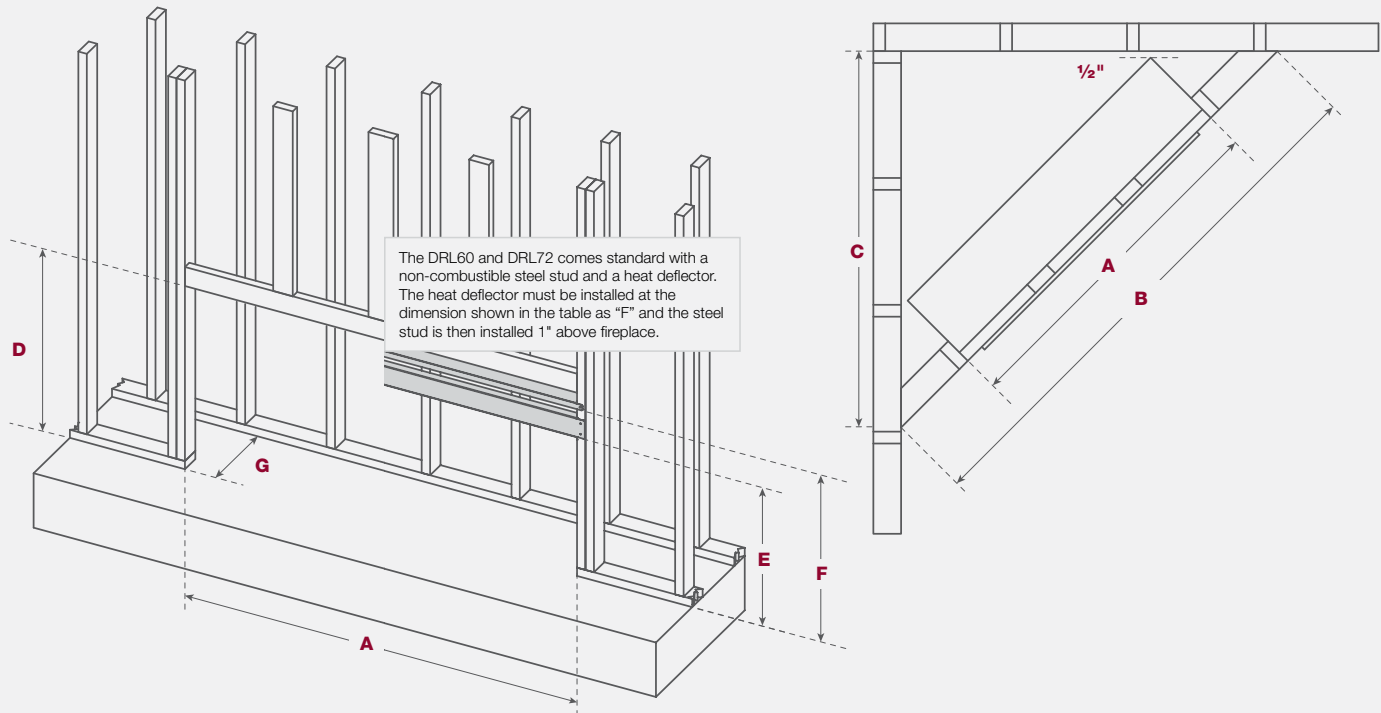

	A	B	C	D	E	F	G
DRL3613	43⅜	67⅞	47½	33⅞	N/A	N/A	14¼
DRL4813	55⅜	79¼	56⅞	33⅞	N/A	N/A	14¼
DRL6013	68⅞	91⅞	64½	33⅞	25½	30⅞	14¼
DRL7213	81	106⅞	78⅞	33⅞	26½	30⅞	16