



1.0 general information

1.1 dimensions


front view

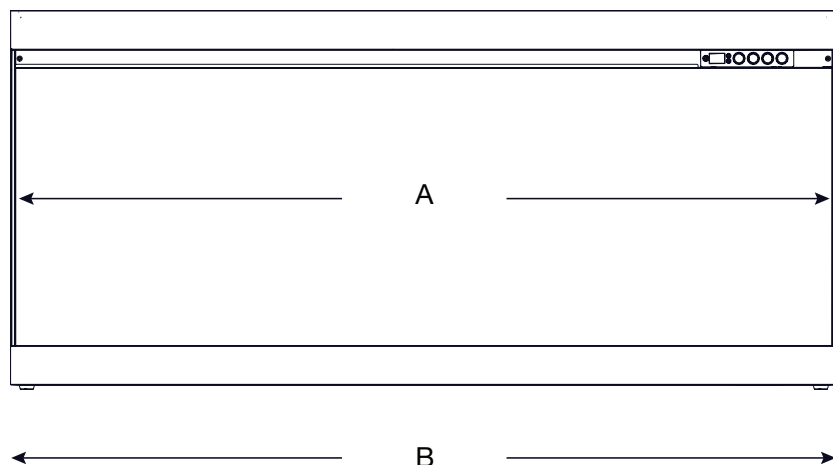

side view

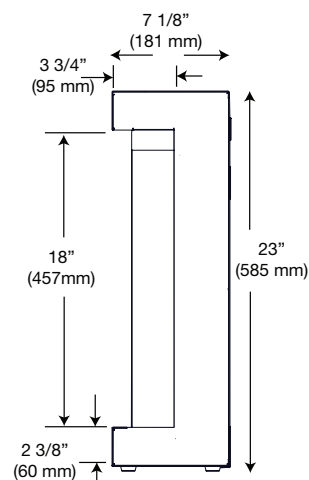

top view

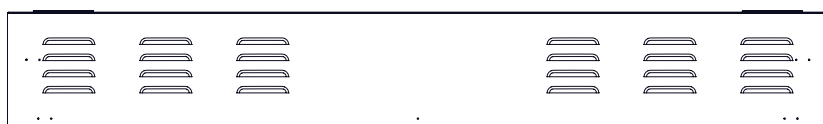

Dimensions		
Model No.	A (inside width)	B (outside width)
NEFL50AB	49 11/16"	50"
	1262 mm	1270 mm
NEFL62AB	61 11/16"	62"
	1567 mm	1575 mm
NEFL74AB	73 11/16"	74"
	1872 mm	1880 mm

1.2 listing approvals

Model No.	Net Weight	Gross Weight
NEFBL50AB	74.5 lbs (33.8 kg)	117.9 lbs (53.5 kg)
NEFL62AB	88.2 lbs (40 kg)	137.8 lbs (62.5 kg)
NEFL74AB	103 lbs (46.7 kg)	160 lbs (72.6 kg)

This appliance has been tested in accordance with the CSA Standards for fixed and location-dedicated electric room appliances in the United States and Canada.

Description	Electric Appliance
Type	Wall mounted Electric fireplace
Voltage	120 V AC / 240 V AC *
Watts	MAX 1500 W / 3000 W *
Amps	Dedicated 15 AMP Grounded Circuit

If you need assistance during installation, please contact your local dealer.

note:

This appliance must be electrically wired and grounded in accordance with local codes or, in the absence of local codes, with the latest edition of the National Electrical Code ANSI/NFPA 70 in the United States or the Canadian Electrical Code, CSA C22.1 in Canada.

1.3 general instructions

- Prior to plugging your appliance into an electrical outlet, verify that the house circuit breakers for the outlet are on.
- The appliance may emit a slight, harmless odour when first used. This odour is normal and it is caused by the initial heating of internal appliance elements and will not occur again.
- If your appliance does not emit heat when called for, consult the “operation” section of this manual for further information.

This electric appliance meets the construction and safety standards of H.U.D. for application in manufactured homes when installed according to these instructions.

As with most electronic devices, your new electric appliance has been designed to operate at temperatures between 5°C (41°F) and 35°C (95°F). During the colder winter months, allow the appliance to reach room temperature before turning it on.