

DRT4200 SERIES

DIRECT VENT GAS FIREPLACES



STANDARD FEATURES

- 🔥 Available in 40" and 45" models
- 🔥 Full-size 21" deep models offer a larger fireplace interior and log arrangement
- 🔥 Top flue configuration
- 🔥 Electronic ignition w/ seamless battery backup provides continued operation in the event of a power outage (IPI/CPI switch standard).
- 🔥 Outstanding heating efficiency for increased comfort and lower operating costs
- 🔥 Ceramic glass for optimum heat transfer and a protective screen*
- 🔥 Beautifully crafted high-definition ceramic fiber log set with heavy-duty grate
- 🔥 Face selections include a Vista inside fit façade or one of several Designer overlap fit façades (required)
- 🔥 Interior selections consist of black reflective porcelain or a variety of ceramic fiber liners (required)
- 🔥 Mood enhancing interior illumination with six distinctive settings
- 🔥 Factory installed blower with six speed settings to fine tune your heating needs
- 🔥 Full-function remote control included (IPI/CPI, thermostat, flame height, blower, lighting)
- 🔥 Durable textured powder coat finish
- 🔥 20 year limited warranty

*All applicable models comply with ANSI Z21.50/88 barrier requirements.

superiorfireplaces.us.com

FAÇADES (ONE REQUIRED)



VISTA – Black



REFLECTION — *Black or Warm Chestnut (shown)*



CRAFTSMAN — *Black (shown) or Warm Chestnut*

REMOTE (INCLUDED)



ProFlame II Remote

LINERS



Porcelain Liner Kit (Black)



Blackstone



Greystone



Blended Brown





STAINLESS SURROUNDS (OPTIONAL)



Available as four-sided or three-sided (Vista Façade req.).


SPECIFICATIONS

APPLIANCE DIMENSIONS

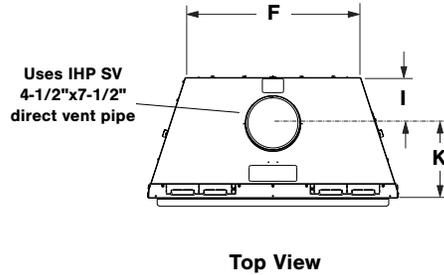

MODEL	A	B	C	D	E	F	H	I	J	K
40" MODELS	37-1/8"	34-5/8"	24-1/2"	34-1/4"	40-1/4"	30"	37-7/8"	6-7/8"	21"	12-3/8"
45" MODELS	37-1/8"	34-5/8"	24-1/2"	39-1/4"	45-1/4"	35"	42-7/8"	6-7/8"	21"	12-3/8"

FRAMING DIMENSIONS

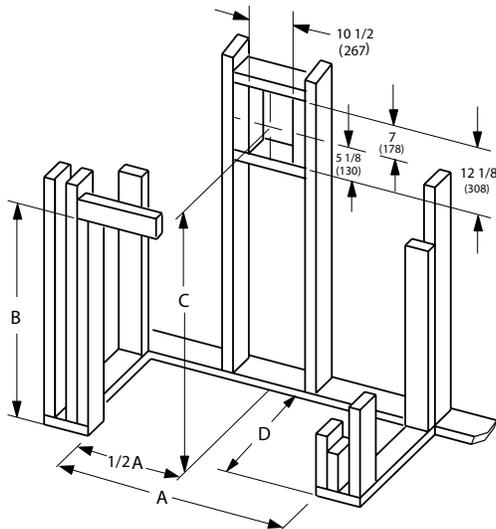

MODEL	A	B	C	D
40" MODELS	40-7/8"	41-1/4" *	43-3/4"	23"
45" MODELS	45-7/8"	41-1/4" *	55-3/4"	23"

* Includes 4" for fold-up standoffs

FIREPLACE EFFICIENCIES

MODEL	FUEL	BTU/HR	P4 / ENERGY*
DRT4240	NG	36,000-24,000	62.4%
DRT4240	LP	31,000-21,000	62.9%
DRT4245	NG	42,000-25,000	62.7%
DRT4245	LP	41,000-22,000	62.4%

*Intermittent ignition systems.

IMPORTANT NOTES:

As with any fireplace, this appliance is extremely hot during operation. Read and understand all operating instructions before using this appliance. For further information, consult your dealer.

Local conditions, such as elevation, wind, vent configuration and choice of fuel will affect overall appearance of the fire and heating performance. Performance can also vary with home design and insulation, climate, condition and type of fuel used, appliance location, burn rate, accessories chosen, chimney installation and how the appliance is operated.

Diagrams, illustrations and photographs are not to scale—consult installation instructions. Product designs, materials, dimensions, specifications, colors and prices are subject to change or discontinuance without notice.

On the Cover: DRT4245 shown with Blackstone Ceramic Fiber Liner



© 2024 Innovative Hearth Products
785819M 06/24

Visit us online
SuperiorFireplaces.us.com

