

Tahoe Direct-Vent Luxury Fireplace

DVX36FP



INCLUDES

- Blower and Dimmer Controlled Accent Light
- 13-Piece Ceramic Fiber log set on a Slope Glaze Excess Burner

REQUIRES

- Fireplace Barrier Screen or Door Set and Frame with Barrier Screen
- Liner

ACTUAL DIMENSIONS

39 3/8" W x 34 3/4" H x 19 7/8" D

GLASS VIEWING AREA

36 1/2" W x 22" H





TECHNICAL INFORMATION

- Maximum heat output:
 - 35,000 BTU (LP)
 - 30,000 BTU (Nat)
- Efficiency Rating:
 - 81.48% A. F. U. E.
 - 60.30% P4
- Weight: 156 lbs.
- Clearances
 - Side Wall: 0"
 - Top Trim: 0"
- Type of Gas: LP or Natural
- Iron Pipe Size: 1/2-inch
- Ignition Systems: Intermittent Pilot, Millivolt
- Vent Size: 4 x 6 inch


FIELD INSTALLED ACCESSORIES

- Liners: Banded Brick, Black Porcelain, Stacked Limestone
- Outer Frame: Steel Frame: Hammered Pewter, Matte Black Aluminum Frame - Hammered Pewter, Matte Black
- Decorative Louvers: Mission - Hammered Pewter, Matte Black Arch - Hammered Pewter, Matte Black


DVX36FP

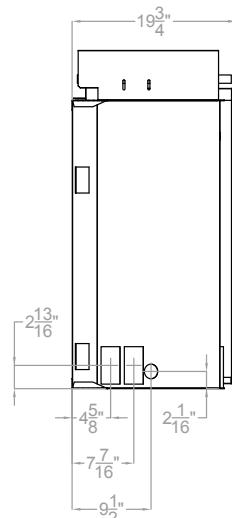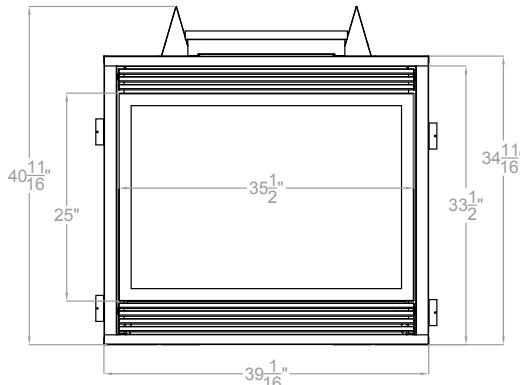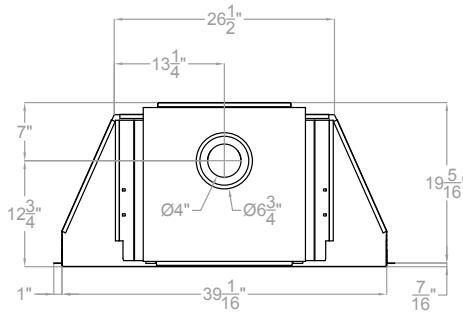

Clearance to Combustibles (in inches)	
Back	0 (0 mm)
Side	0 (0 mm)
Floor	0 (0 mm)
Top Stand-off	0 (0 mm)
Top Framing Edge	6 (152 mm)

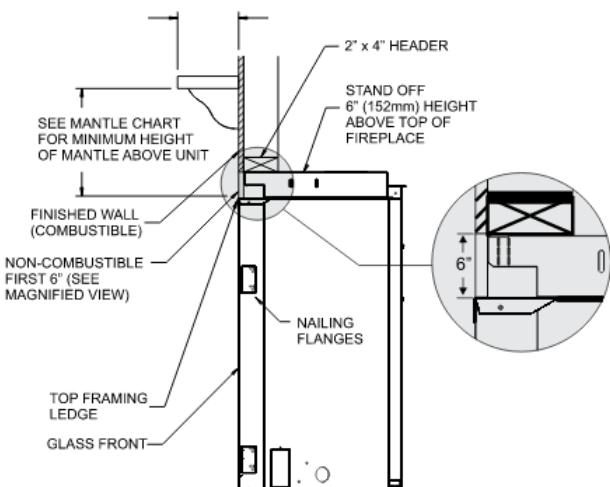

Framing Dimensions (in inches)	
Height (A)	40 7/8
Width (B)	39 3/8
Depth (C)	19 7/8

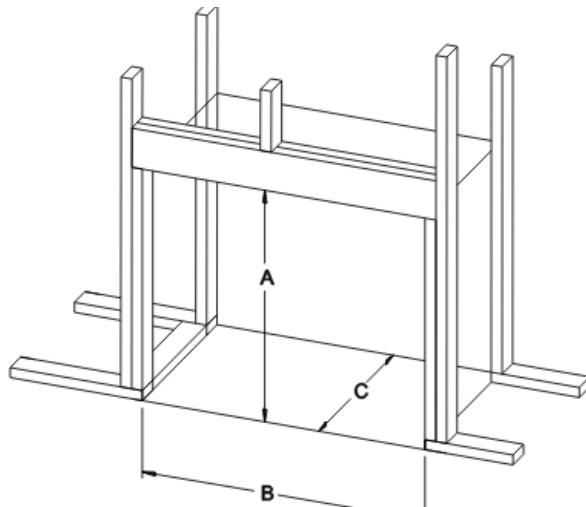

Empire is committed to continuous product improvement; specifications are subject to change without notice. Dimensions in this brochure are approximate; read and follow the framing dimensions in the owners manual supplied with your Empire product. Flame size, shape, and color will vary from photos. Our mantels feature natural veneers and hand-rubbed finishes – wood grain and color will vary. Adjust light levels and use “natural light” incandescent bulbs to enhance the dramatic look for your wooden mantel.

Member of the following industry associations:



This appliance is design-certified
to the ANSI standard by:

The Empire Comfort Systems and White Mountain Hearth names and logos are registered U.S. trademarks.

Empire Comfort Systems Inc.
918 Freeburg Ave.
Belleville, IL 62220-2623
info@empirecomfort.com
01/18

Tahoe Direct-Vent Luxury Fireplace DVX42FP



INCLUDES

- Blower and Dimmer Controlled Accent Light
- 13-Piece Ceramic Fiber log set

REQUIRES

- Fireplace Barrier Screen or Door Set and Frame with Barrier Screen
- Liner

ACTUAL DIMENSIONS

43" W x 40 3/4" H x 19 7/8" D

GLASS VIEWING AREA

36 1/2" W x 22" H



TECHNICAL INFORMATION

- Maximum heat output: 37,000 BTU (LP ,Nat)
- Efficiency Rating:
 - 78.31% A.F.U.E.
 - 64.30% P4
- Weight: 178 lbs.
- Clearances
 - Side Wall: 0"
 - Top Trim: 0"
- Type of Gas: LP or Natural
- Iron Pipe Size: 1/2-inch
- Ignition Systems: Intermittent Pilot, Millivolt
- Vent Size: 5 x 8 inch Top Vent Only


FIELD INSTALLED ACCESSORIES

- Liners: Banded Brick, Black Porcelain, Stacked Limestone
- Outer Frame: Steel Frame - Hammered Pewter, Matte Black
- Aluminum Frame - Hammered Pewter, Matte Black
- Decorative Louvers: Mission - Hammered Pewter, Matte Black
- Arch - Hammered Pewter, Matte Black


DVX42FP

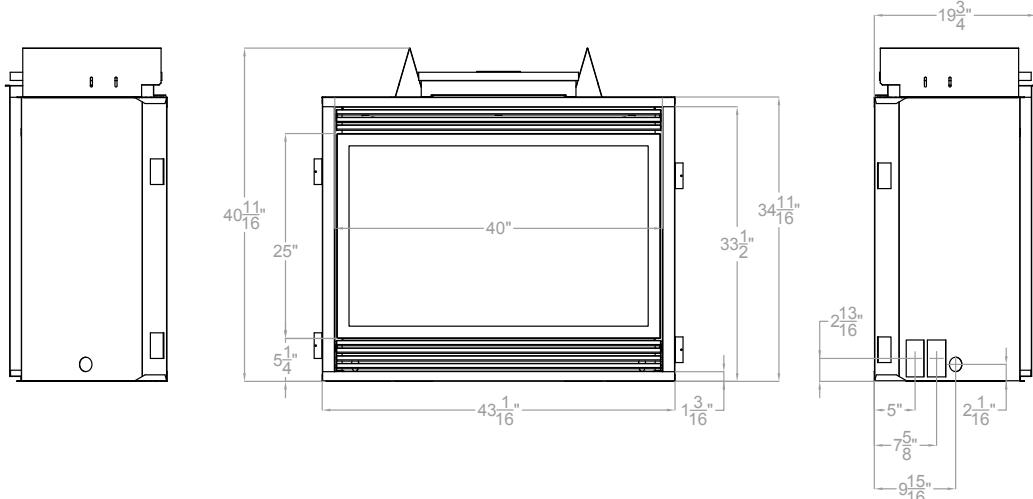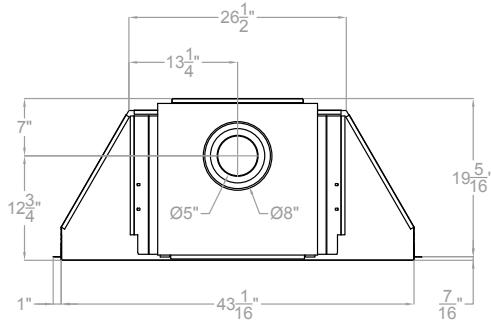

Clearance to Combustibles (in inches)	
Back	0 (0 mm)
Side	0 (0 mm)
Floor	0 (0 mm)
Top Stand-off	0 (0 mm)
Top Framing Edge	6 (152 mm)

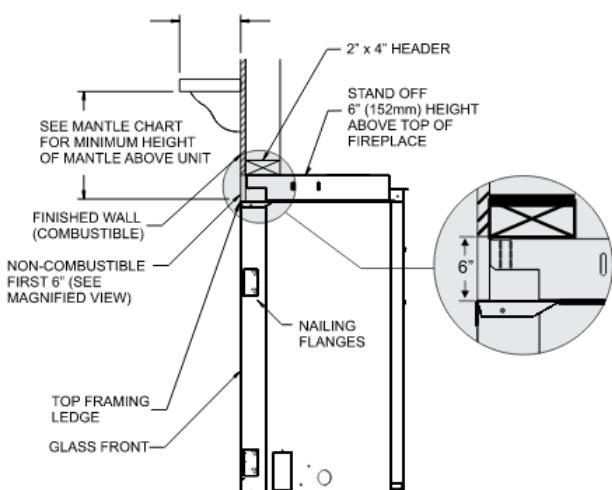

Framing Dimensions (in inches)	
Height (A)	40 7/8
Width (B)	43 3/8
Depth (C)	19 7/8

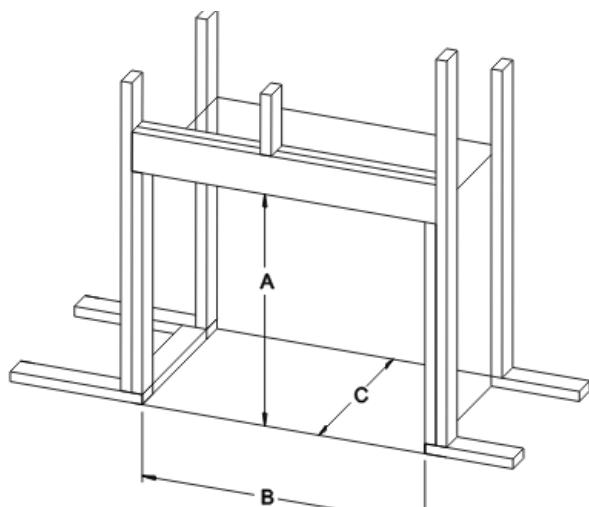

Empire is committed to continuous product improvement; specifications are subject to change without notice. Dimensions in this brochure are approximate; read and follow the framing dimensions in the owners manual supplied with your Empire product. Flame size, shape, and color will vary from photos. Our mantels feature natural veneers and hand-rubbed finishes – wood grain and color will vary. Adjust light levels and use “natural light” incandescent bulbs to enhance the dramatic look for your wooden mantel.

Member of the following industry associations:



This appliance is design-certified
to the ANSI standard by:

The Empire Comfort Systems and White Mountain Hearth names and logos are registered U.S. trademarks.